



Design Radiators by ISAN

Club Edge

The cubist form of the profiles placed on a pair of side rails will find its use in modern loft-type interiors by smoothly interconnecting individual open spaces.



connection
sets



electric
regulators



colour
ref. chart



Club Edge



Code Height (H) / Length (L) [mm]	Depth (B) [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [-]	Output 75/65/20°C [W]	Power input [W]	Connection span [mm]	White colour RAL 9016 [€]	Electric [€]
DCLE 1182 0600	60	22,2	10,7	1,215	748	800	562	✓	✓
DCLE 1470 0600	60	25,8	13,0	1,244	868	1 000	562	✓	✓
DCLE 1758 0600	60	32,2	15,9	1,215	1 110	1 200	562	✓	✓

The weight of radiators does not include water and packaging.

Technical information


Material	steel profiles 30×30 mm
Connection threads	4×G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Počet profilů	21, 25, 31

Modification options


Surface treatment	colour
Height range [mm]	606-1 998 (increase of 48)
Length range [mm]	400-1 000 (increase of 10)
Change of dimensions	additional charge 30 % ¹⁾
Electric version	YES
Standard connection (SK)	STANDARD
Middle connection (SM)	YES (additional charge)
Side connection (SB)	NO
One-sided into space fixing	NO

¹⁾ to the nearest larger standard dimension

Type height (H) / length (L) [mm]

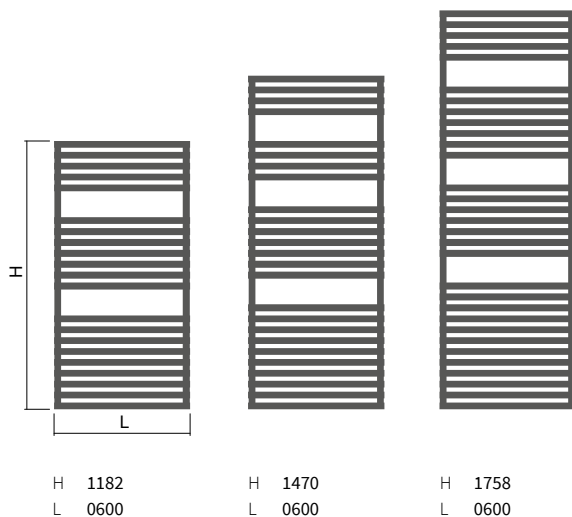


Mounting



Type	X [mm]	A [mm]
Metal brackets	55-65	100-110

Connection options



The type of connection must be specified in the order