



Design Radiators by ISAN

Collom Double

This vertically-mounted heating unit with a double row of steel sections features an exceptionally high heat output. It can be fitted with two-sided stainless steel rails as an option. The Collom Double will find its use in modern interiors, especially in bedrooms and entrance halls.



bath accessories
→ 143



connection sets
→ 144



colour ref. chart
→ 161



Collom Double



Code Height (H) /Length (L) [mm]	Depth (B) [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [-]	Output 75/65/20°C [W]	Power input Z heating rod, Mini ECO, Vision [W]	Power input Rio, Neo, Vivo [W]	Connection span (Z) [mm]	White colour RAL 9016	Electric	Printed motif
DCLD 1800 0298	48	28,3	7,9	1,321	872	-	-	50	✓	-	-
DCLD 1800 0450	48	42,3	11,9	1,321	1259	-	-	50	✓	-	-
DCLD 1800 0602	48	56,4	15,9	1,321	1632	-	-	50	✓	-	-

For ordering procedure see page 162 / The weight of radiators does not include water and packaging


Technical information

Material	steel pipes Ø 28 mm steel profiles 70×11 mm
Connection threads	2xG1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	8, 12, 16

Modification options

Surface treatment	colour
Height range [mm]	500-2000 (increase of 10)
Length range [mm]	298-754 (increase of 76)
Change of dimensions	additional charge
Electric version	NO
Middle connection (SM)	STANDARD
Side connection (SB)	YES (additional charge)
One-sided into space fixing	NO

Type height (H) / length (L) [mm]

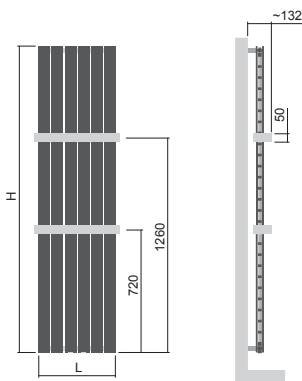


H 1800
L 0298-0602

Option of adding up to 2 rails


One rail is suitable for radiators installed 800 mm above the floor level and higher, while two rails 1 200 mm and higher.

Mounting




Type	X [mm]	A [mm]
Metal brackets	64-74	88-98

Connection options



The type of connection must be specified in the order; for more information see page 162, positions 13 and 14.

Rails



Two-sided brushed stainless steel rail

Length [mm]	Code
298	O15MN81-20
450	O15MN81-21
602	O15MN81-22

Two-sided rail - painted RAL 9016

Length [mm]	Code
298	O15MN01-20
450	O15MN01-21
602	O15MN01-22

Two-sided polished stainless steel rail

Length [mm]	Code
298	O15MN87-20
450	O15MN87-21
602	O15MN87-22

Painted rails are also available in colour variations as per the ISAN colour chart at an extra charge.