

## Design thermostatic valve with combined heating possibility

- connecting thread G1/2" span 50 mm
- regulation according to the room temperature
- universal design, thermostatic head may be on left or right side
- white and chrome surface
- return pipe always on thermostatic head side
- possibility of installing electrical heating rod
- designed especially for radiators Miro, Swing, Swingo, Koro, Koro Plus and Koro Extra



### Corner thermostatic valve

Pack nr. 41 / white /code: O19BWC-41

Corner thermostatic valve

Connection to cooper pipe ø 15 mm

Thermostatic head RAX, design white  
Corner thermostatic valve, design white  
Clamping fittings for Cu pipes, design chrome

Pack nr. 42 / white /code: O19BWA-42

Corner thermostatic valve

Connection to Al/PE-X and Al/PERT pipe ø 16x2 mm

Thermostatic head RAX, design white  
Corner thermostatic valve, design white  
Clamping fittings for Al/PE-X and Al/PERT pipes, design chrome

Pack nr. 43 / chrome /code: O19CWC-43

Corner thermostatic valve

Connection to cooper pipe ø 15 mm

Thermostatic head RAX, design chrome  
Corner thermostatic valve, design chrome  
Clamping fittings for Cu pipes, design chrome

Pack nr. 44 / chrome /code: O19CWA-44


Corner thermostatic valve

Connection to Al/PE-X and Al/PERT pipe ø 16x2 mm

Thermostatic head RAX, design chrome  
Corner thermostatic valve, design chrome  
Clamping fittings for Al/PE-X and Al/PERT pipes, design chrome

### Possibility of connection

The valve allows the installation of heating rod on right or left side

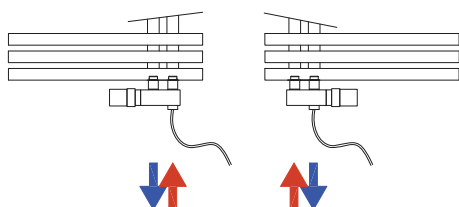

### Installation of heating rod



150 W

Code: 484000245

300 W

Code: 484000246

600 W

Code: 484000247

