


# Echo

## Echo Inox

The Echo Inox radiator is primarily made of brushed stainless steel which beautifully accentuates the polished steel component. The unit provides a stylish complement to bathroom or kitchen taps as well as to sanitary accessories.

Innovations of this popular model include a colour design which stands out especially in metallic colours.

	Echo	Echo Inox
Material	steel profiles 35x35 mm steel profiles 35x15 mm	stainless steel profiles 30x30 mm stainless steel profiles 30x20 mm
Connection threads	4xG1/2"	4xG1/2"
Testing overpressure	0,65 MPa	1,3 MPa
Max. op. overpressure	0,5 MPa	1,0 MPa
Max. operating temperature	110 °C	95 °C
Number of profiles	12, 15, 21	15, 18, 21

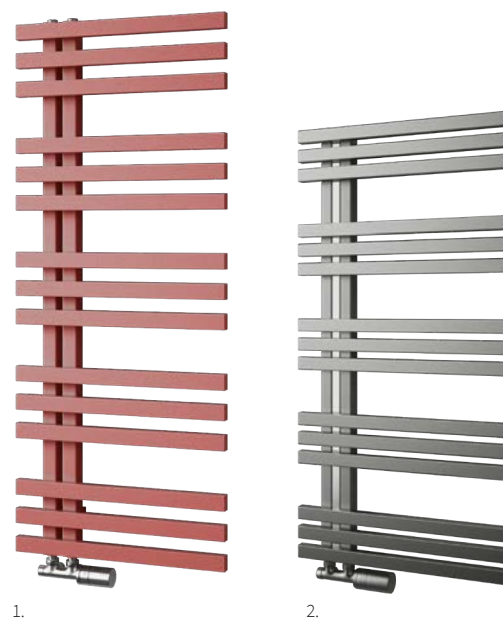

1. Echo - Pink coral texture S32 [26] / 2. Echo Inox / 3. Echo - Black velvet matt S40 [51]




### Modification options

	Echo
Surface treatment	colour
Height range [mm]	695-1 735 (increase of 260)
Length range [mm]	500, 600
Dimension changes	additional charge 30 % <sup>1)</sup>
Electric version	YES (additional charge)
Standard connection (SK)	STANDARD
Middle connection (SM)	NO
Side connection (SB)	NO


### Echo Inox

Surface treatment	combination brushed polished stainless steel
Height range [mm]	780-1 880 (increase of 220)
Length range [mm]	400-600 (increase of 50)
Dimension changes	additional charge 30 % <sup>1)</sup>
Electric version	YES (additional charge)
Standard connection (SK)	STANDARD
Middle connection (SM)	NO
Side connection (SB)	NO


### Accessories

-  Colour ref. chart page 115
-  Bath. accessories page 100
-  Thermostatic packs page 102
-  Electric regulators page 108

### Connection Options - left design



### right design

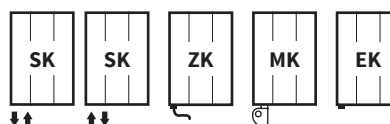

The type of connection must be specified in the order; for more information see page 112, positions 13 and 14./<sup>1)</sup> to the nearest larger standard dimension

# Echo



Height (H) Length (L) [mm]	Depth (B)	Weight	Water capacity	Temperature exponent	Output 75/65/20°C	Power input Z heat. rod, Mini PW, Vision	Power input Solo, Rio, Neo	Connection span (Z)	White colour RAL 9016	Electric
code	[mm]	[kg]	[l]	[-]	[W]	[W]	[W]	[mm]		
DECC 0955 0500	50	10,2	4,2	1,291	388	400	400	50	✓	✓
DECC 1215 0500	50	12,8	5,3	1,297	471	500	400	50	✓	✓
DECC 1735 0500	50	18,0	7,5	1,308	635	600	600	50	✓	✓

# Echo Inox




Height (H) Length (L) [mm]	Depth (B)	Weight	Water capacity	Temperature exponent	Output 75/65/20°C	Power input Z heat. rod, Mini PW, Vision	Power input Solo, Rio, Neo	Connection span (Z)	Stainless steel	Electric
code	[mm]	[kg]	[l]	[-]	[W]	[W]	[W]	[mm]		
DXEC 1000 0500	50	12,7	4,9	1,300	464	500	400	50	✓	✓
DXEC 1220 0500	50	15,5	5,5	1,300	559	600	600	50	✓	✓
DXEC 1660 0500	50	21,1	7,5	1,300	749	700	800	50	✓	✓

For ordering procedure see page 112 / The weight of radiators does not include water and packaging.

## Type height (H) / length (L) [mm]

### Echo

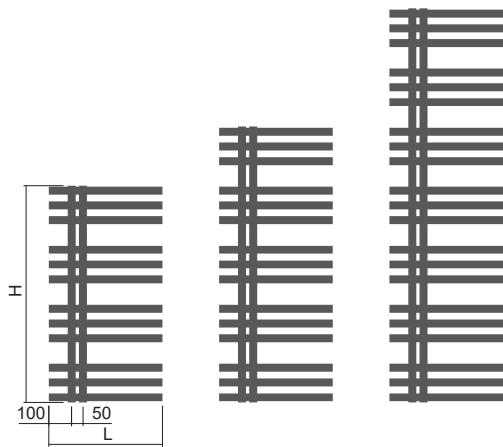


H: 0955  
L: 0500

H: 1215  
L: 0500


H: 1735  
L: 0500

Right design

Left design



### Echo Inox

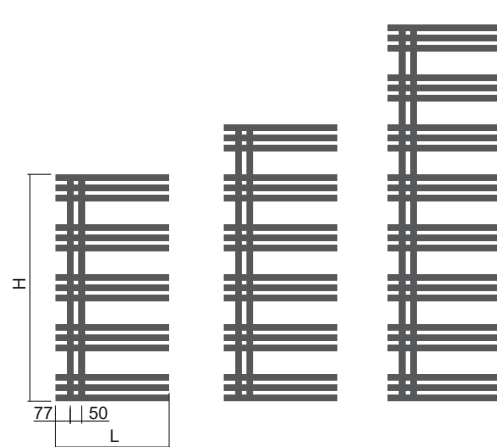

H: 1000  
L: 0500

H: 1220  
L: 0500

H: 1660  
L: 0500

#### Ordering information

Models to be connected to central heating do not require left /right design specification.

With regard to the electric version, the left /right design specification must be noted in the order.

## Mounting

### Echo



Type X [mm] A [mm]  
Metal brackets 57,5-67,5 90-100

### Echo Inox



Type X [mm] A [mm]  
Metal brackets 60-70 95-105