

ECHO INOX


| | |
|-----------------------------|--|
| Material | stainless steel profiles 30 × 30 mm stainless steel profiles 30 × 20 mm |
| Connection thread | 4 × G1/2" |
| Testing overpressure | 1,3 MPa |
| Max. operating overpressure | 1,0 MPa |
| Max. operating temperature | 95 °C |
| Number of profiles | 15 |
| Surface treatment | brushed stainless steel, polished stainless steel |




ECHO INOX 1000 × 500

| Type H/L [mm] | Depth B [mm] | Weight [kg] | Water capacity [l] | Temperature exponent [n] | Heating Output [W] | | | Recommended power input stainless steel [W] | Connection span [mm] |
|-----------------|--------------|-------------|--------------------|--------------------------|--------------------|-------------|-------------|---|----------------------|
| | | | | | 75/65/20 °C | 70/55/20 °C | 55/45/20 °C | | |
| 1000/500 | 50 | 12,7 | 4,9 | 1,30 | 464 | 376 | 239 | - | mc 50 |

Thermal power measuring follows in accordance with EN 442.
Accessories (page 64, 65 and 66) is not part of the radiator.



Connection options

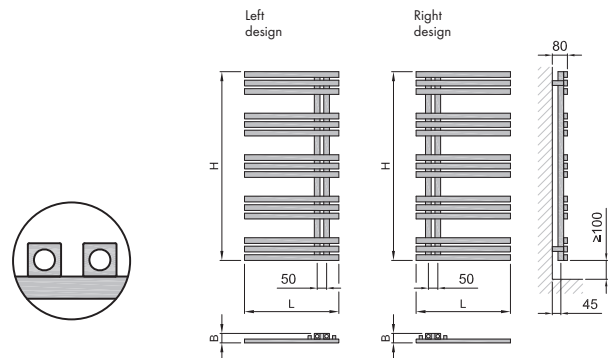

DXEC 1000 0500...

DXEC 1000 0500...