


Gradda Inox

Its geometrically refined lines and high-quality brushed stainless steel design have predestined the Gradda Inox radiator for truly universal use in bathrooms, kitchens, bedrooms and other smaller spaces.

| | |
|----------------------------|-----------------------------------|
| Material | stainless steel profiles 30×30 mm |
| Connection threads | 4 x G1/2" |
| Testing overpressure | 1,3 MPa |
| Max. op. overpressure | 1,0 MPa |
| Max. operating temperature | 95°C |
| Number of profiles | 10, 12 |



1.

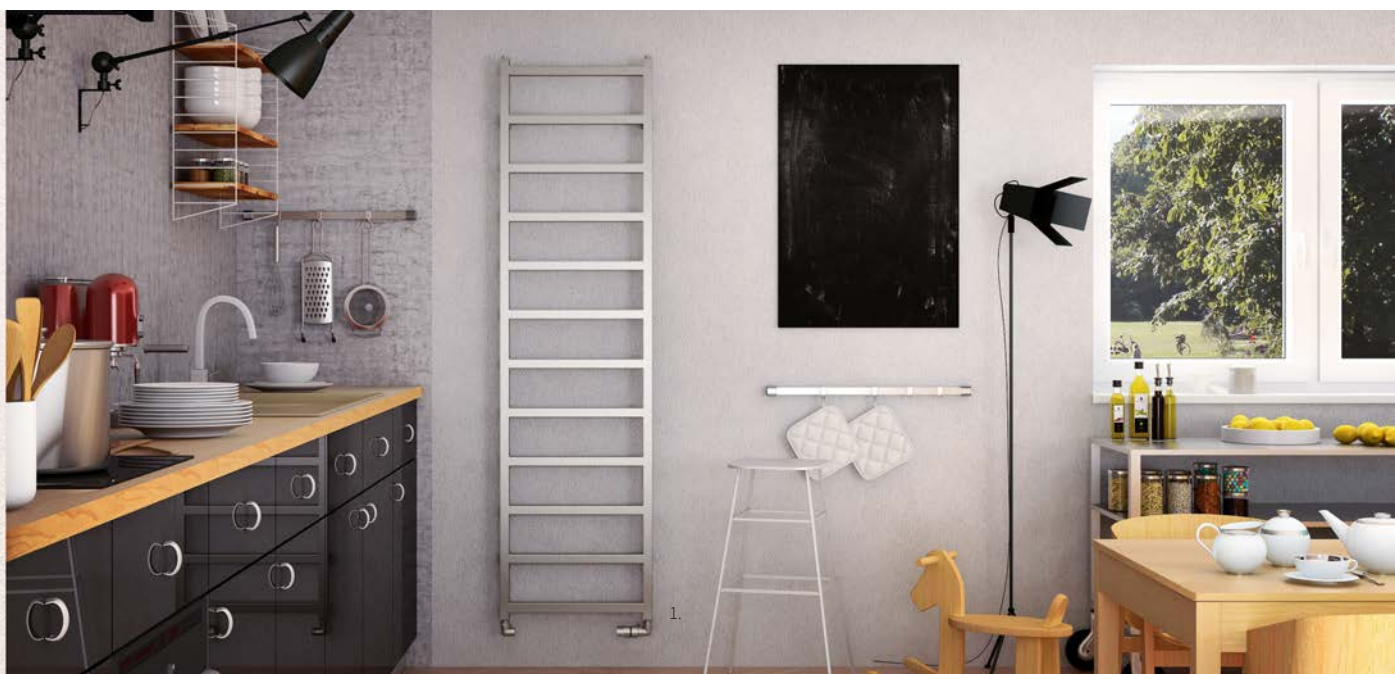

1. Gradda Inox



Modification options

| | |
|-----------------------------|--------------------------------------|
| Surface treatment | brushed stainless steel |
| Height range [mm] | NO |
| Length range [mm] | 400-600 (increase of 50) |
| Dimension changes | additional charge 30 % ¹⁾ |
| Electric version | YES (additional charge) |
| Standard connection (SK) | STANDARD |
| Middle connection (SM) | NO |
| Side connection (SB) | NO |
| One-sided into space fixing | NO |


Gradda Inox

| | |
|-----------------------------|--------------------------------------|
| Surface treatment | brushed stainless steel |
| Height range [mm] | NO |
| Length range [mm] | 400-600 (increase of 50) |
| Dimension changes | additional charge 30 % ¹⁾ |
| Electric version | YES (additional charge) |
| Standard connection (SK) | STANDARD |
| Middle connection (SM) | NO |
| Side connection (SB) | NO |
| One-sided into space fixing | NO |

Accessories

-  Thermostatic packs page 102
-  Electric regulators page 108

Connection Options

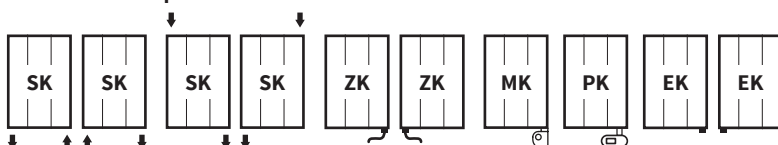


The type of connection must be specified in the order; for more information see page 112, positions 13 and 14. ¹⁾ to the nearest larger standard dimension




| Height (H) Length (L) [mm] | Depth (B) | Weight | Water capacity | Temperature exponent | Output 75/65/20°C | Power input Z heat. rod, Mini PW, Vision | Power input Solo, Rio, Neo | Connection span (Z) | Stainless steel | Electric |
|----------------------------|-----------|--------|----------------|----------------------|-------------------|--|----------------------------|---------------------|-----------------|----------|
| code | [mm] | [kg] | [l] | [-] | [W] | [W] | [W] | [mm] | | |
| DXGR 1520 0500 | 30 | 10,3 | 5,4 | 1,300 | 356 | 400 | 400 | 470 | ✓ | ✓ |
| DXGR 1840 0500 | 30 | 11,2 | 5,6 | 1,300 | 429 | 400 | 400 | 470 | ✓ | ✓ |

For ordering procedure see page 112 / The weight of radiators does not include water and packaging.

Type height (H) / length (L) [mm]

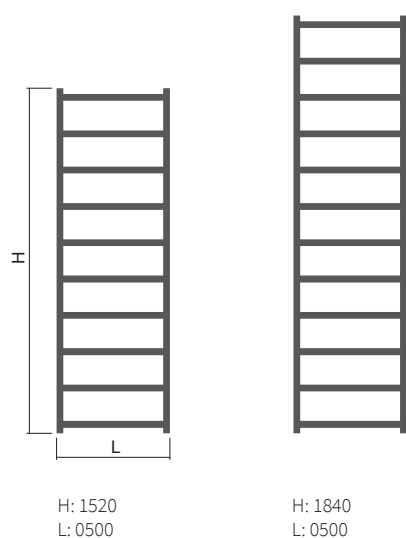

Mounting



| Type | X [mm] | A [mm] |
|----------------|--------|--------|
| Metal brackets | 74-84 | 89-99 |



Gradda Inox