

# Ikaria / Ikaria Radius / Ikaria Double

Clean, round lines of two types of heating pipes are arranged into single-row, double-row and semicircular configurations. An ideal combination of elegance and functionality

Material	steel pipes Ø 28 mm steel pipes Ø 22 mm
Connection threads	4×G1/2"
Testing overpressure	1,3 MPa
Max. op. overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes Ikaria, Ikaria Radius	14, 24, 36
Number of pipes Ikaria Double	28, 48, 72



1. Ikaria - Snow/traffic white RAL 9016 [01] / 2. Ikaria Radius - Antique gold metallic S36 [48] / 3. Ikaria Double - Ivory/cream RAL 9001 [04] / 4. Ikaria electric with reg. Rio white - Snow/traffic white RAL 9016 [01]

## Modification options

Surface treatment	colour
Height range [mm]	332-1 972 (increase of 40)
Length range [mm]	400-1 000 (increase of 10)
Dimension changes	additional charge 30 % <sup>1)</sup>
Electric version	YES (additional charge)
Standard connection (SK)	STANDARD
Middle connection (SM)	YES (additional charge)
Side connection (SB)	NO
One-sided into space fixing	YES (additional charge)

## Ikaria Radius

colour	332-1 972 (increase of 40)
500, 600	additional charge 30 % <sup>1)</sup>
YES (additional charge)	STANDARD
YES (additional charge)	YES (additional charge)
NO	NO
NO	NO


## Ikaria Double

colour	332-1 972 (increase of 40)
400-1 000 (increase of 10)	additional charge 30 % <sup>1)</sup>
YES (additional charge)	STANDARD
YES (additional charge)	YES (additional charge)
NO	NO
YES (additional charge)	YES (additional charge)

## Accessories

- Colour ref. chart page 115
- Thermostatic packs page 102
- Electric regulators page 108

## Connection Options

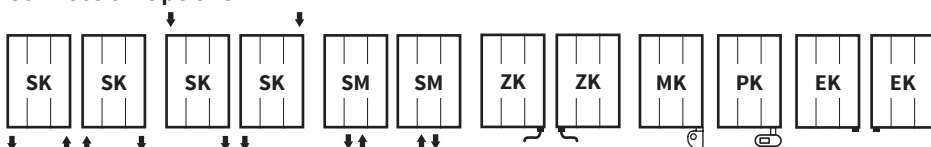

The type of connection must be specified in the order; for more information see page 112, positions 13 and 14./<sup>1)</sup> to the nearest larger standard dimension

# Ikaria



Height (H) Length (L) [mm]	Depth (B)	Weight	Water capacity	Temperature exponent	Output 75/65/20°C	Power input Z heat. rod. Mini PW, Vision	Power input Solo, Rio, Neo	Connection span (Z)	White colour RAL 9016	Electric
code	[mm]	[kg]	[l]	[-]	[W]	[W]	[W]	[mm]		
DIKA 0732 0500	48	6,1	2,7	1,187	337	300	400	464	✓	✓
DIKA 0732 0600	48	7,0	3,2	1,187	389	400	400	564	✓	✓
DIKA 1212 0500	48	10,3	4,7	1,187	573	600	600	464	✓	✓
DIKA 1212 0600	48	11,8	5,4	1,187	663	700	600	564	✓	✓
DIKA 1772 0500	48	15,4	7,0	1,187	855	900	800	464	✓	✓
DIKA 1772 0600	48	17,7	8,1	1,187	989	1000	1000	564	✓	✓

Chrome plating reduces the heat output by as much as 30%.

# Ikaria Radius



Height (H) Length (L) [mm]	Depth (B)	Weight	Water capacity	Temperature exponent	Output 75/65/20°C	Power input Z heat. rod. Mini PW, Vision	Power input Solo, Rio, Neo	Connection span (Z)	White colour RAL 9016	Electric
code	[mm]	[kg]	[l]	[-]	[W]	[W]	[W]	[mm]		
DIKR 0732 0500	89	6,1	2,8	1,235	349	300	400	446	✓	✓
DIKR 0732 0600	102	7,0	3,2	1,235	400	400	400	546	✓	✓
DIKR 1212 0500	89	10,4	4,7	1,235	593	600	600	446	✓	✓
DIKR 1212 0600	102	12,0	5,5	1,235	682	700	600	546	✓	✓
DIKR 1772 0500	89	15,5	7,1	1,235	878	900	800	446	✓	✓
DIKR 1772 0600	102	17,9	8,2	1,235	1 018	1 000	1000	546	✓	✓

# Ikaria Double




Height (H) Length (L) [mm]	Depth (B)	Weight	Water capacity	Temperature exponent	Output 75/65/20°C	Power input Z heat. rod. Mini PW, Vision	Power input Solo, Rio, Neo	Connection span (Z)	White colour RAL 9016	Electric
code	[mm]	[kg]	[l]	[-]	[W]	[W]	[W]	[mm]		
DIKD 0732 0600	68	12,4	5,7	1,141	591	600	600	564	✓	✓
DIKD 1212 0600	68	21,2	9,7	1,141	955	1 000	1 000	564	✓	✓
DIKD 1772 0600	68	31,8	14,6	1,141	1 429	1 200	1 200	564	✓	✓


For ordering procedure see page 112 / The weight of radiators does not include water and packaging.

## Type height (H) / length (L) [mm]

Ikaria/ Ikaria Radius

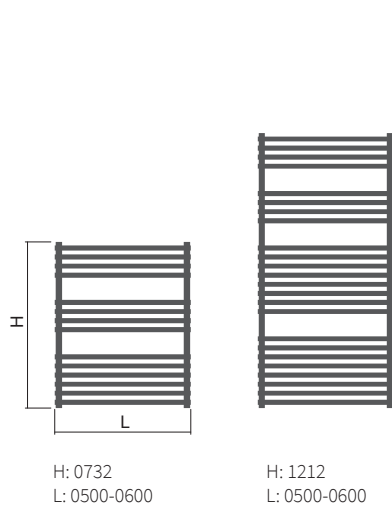


Ikaria Double

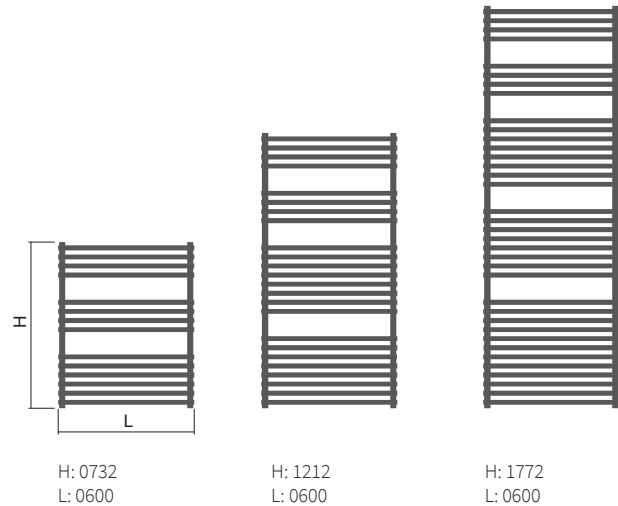


## Mounting

Ikaria




Type	X [mm]	A [mm]
Plastic brackets (RAL 9016, chrom)	50-60	85-95
Metal brackets (Other colours)	45-55	80-90

Ikaria Radius

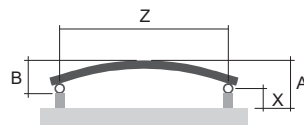

Type	Length [mm]	X [mm]	A [mm]
Metal brackets (RAL 9016, other colours)	500	54-64	129-139
	600	62-72	142-152

Ikaria Double

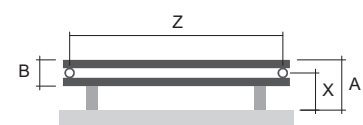

Type	X [mm]	A [mm]
Plastic brackets (RAL 9016)	98-108	133-143
Metal brackets (Other colours)	93-103	128-138