

MAPIA PLUS | MAPIA PLUS DOUBLE



MAPIA PLUS

Material	steel pipes \varnothing 28 mm / steel profiles 50 × 10 mm
Connection thread	4 × G1/2"
Testing overpressure	0,5 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	11, 17, 25

MAPIA PLUS DOUBLE

Material	steel pipes \varnothing 28 mm / steel profiles 50 × 10 mm
Connection thread	4 × G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	22, 34, 50



MAPIA PLUS 1180 × 606

MAPIA PLUS


Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
732/506	35	9,0	2,4	1,227	355	291	190	-	-	456
732/606	35	10,0	2,8	1,227	416	341	223	-	-	556
1180/506	35	13,5	3,9	1,240	545	446	289	-	-	456
1180/606	35	16,0	4,5	1,240	638	522	339	-	-	556
1740/506	35	19,5	5,8	1,257	765	624	402	-	-	456
1740/606	35	23,0	6,5	1,257	896	730	471	-	-	556

MAPIA PLUS DOUBLE



Type H/L [mm]	Depth B1 [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
732/506	46	15,6	4,3	1,218	504	413	271	-	-	456
732/606	46	18,4	5,0	1,218	581	477	312	-	-	556
1180/506	46	24,2	6,8	1,228	751	615	401	-	-	456
1180/606	46	28,5	7,9	1,228	892	731	476	-	-	556
1740/506	46	35,5	10,0	1,275	1070	870	558	-	-	456
1740/606	46	41,8	11,6	1,275	1271	1033	663	-	-	556

Thermal power measuring follows in accordance with EN 442.

Accessories (page 64, 65 and 66) is not part of the radiator.



Connection options

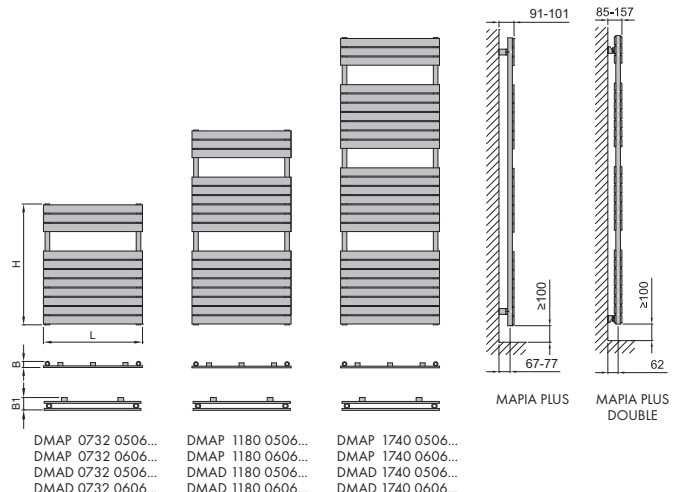

- DMAP 0732 0506...
- DMAP 1180 0506...
- DMAP 1740 0506...
- DMAP 0732 0606...
- DMAP 1180 0606...
- DMAP 1740 0606...
- DMAD 0732 0506...
- DMAD 1180 0506...
- DMAD 1740 0506...
- DMAD 0732 0606...
- DMAD 1180 0606...
- DMAD 1740 0606...