



MIRO	
Material	steel profiles 35 × 35 mm steel profiles horizontal 50 × 10 mm
Connection thread	4 × G 1/2"
Testing overpressure	0,65 Mpa
Max. operating overpressure	0,5 Mpa
Max. operating temperature	110 °C
Numbers of profiles	15, 18






Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [-]	Heating Output [W]			Recommended power		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
1236/500	57	13,8	4,8	1,24	561	458	298	-	-	50
1500/600	57	18,9	6,4	1,24	771	630	409	-	-	50

Thermal power measuring follows in accordance with EN442.
Connection fittings are not part of the radiator.

Right design

Left design

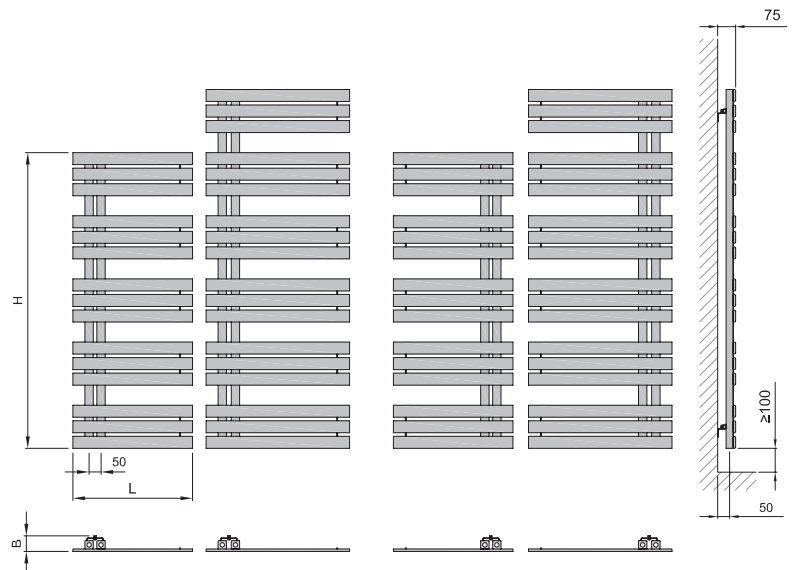

Connection options