



**Design Radiators** by ISAN

# Silla Radius Inox

The curved pipes of the popular Silla Inox add to its appeal. The unit's stainless steel design is suitable for virtually any bathroom.



connection sets  
→ 146



electric regulators  
→ 154





# Silla Radius Inox



Code Height (H) / Length (L) [mm]	Depth (B) [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [-]	Output 75/65/20°C [W]	Power input [W]	Connection span [mm]	Stainless steel	Electric
<b>DXSR 0820 0600</b>	<b>94</b>	<b>8,4</b>	<b>4,1</b>	<b>1,300</b>	<b>284</b>	<b>400</b>	<b>560</b>	✓	✓
<b>DXSR 1180 0600</b>	<b>94</b>	<b>10,0</b>	<b>6,5</b>	<b>1,300</b>	<b>432</b>	<b>400</b>	<b>560</b>	✓	✓
<b>DXSR 1765 0600</b>	<b>94</b>	<b>14,9</b>	<b>9,7</b>	<b>1,300</b>	<b>647</b>	<b>600</b>	<b>560</b>	✓	✓

For ordering procedure see page 160 / The weight of radiators does not include water and packaging.


## Technical information

Material	stainless steel pipes Ø 40 mm stainless steel pipes Ø 22 mm
Connection threads	4×G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	95 °C
Number of pipes	14, 22, 33

## Modification options


Surface treatment	brushed stainless steel
Height range [mm]	640-1765 (increase of 45)
Length range [mm]	500, 600
Change of dimensions	additional charge
Electric version	YES (additional charge)
Standard connection (SK)	STANDARD
Middle connection (SM)	YES (additional charge)
Side connection (SB)	NO
One-sided into space fixing	NO

## Type height (H) / length (L) [mm]

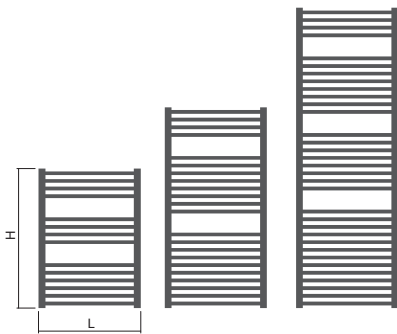

H 0820	H 1180	H 1765
L 0600	L 0600	L 0600

## Mounting



Type	X [mm]	A [mm]
Metal brackets	79-89	155-165

## Connection options



The type of connection must be specified in the order; for more information see page 160, positions 13 and 14.