Design Radiators by ISAN

Avondo

A standard bathroom ladder with one to three pipes extending forward, depending on the size. This allows for practical hanging of towels and clothes, making this unit an indispensable functional part of every bathroom.

connection sets → 144
electric regulators → 154
colour ref. chart → 161

Avondo

Code Height (H) /Length (L) [mm]	Depth (B) [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [-]	Output 75/65/20°C [W]	Power imput Z heating rod, Mini ECO, Vision [W]	Power imput Rio, Neo, Vivo [W]	Connection span (Z) [mm]	White colour RAL 9016	Electric
DLNN 0775 0500	**91**	**8,4**	**5,2**	**1,279**	**409**	**400**	**400**	**459**	✓	✓
DLNN 0775 0600	**91**	**9,8**	**6,0**	**1,279**	**479**	**500**	**400**	**559**	✓	✓
DLNN 1215 0500	**91**	**13,2**	**8,2**	**1,277**	**643**	**600**	**600**	**459**	✓	✓
DLNN 1215 0600	**91**	**15,4**	**9,5**	**1,277**	**753**	**800**	**800**	**559**	✓	✓
DLNN 1575 0500	**91**	**16,1**	**10,1**	**1,276**	**833**	**800**	**800**	**459**	✓	✓
DLNN 1575 0600	**91**	**18,9**	**11,6**	**1,276**	**976**	**1 000**	**1000**	**559**	✓	✓
DLNN 1775 0500	**91**	**19,2**	**12,0**	**1,276**	**938**	**900**	**1000**	**459**	✓	✓
DLNN 1775 0600	**91**	**22,6**	**13,9**	**1,276**	**1 100**	**1 200**	**1200**	**559**	✓	✓

For ordering procedure see page 162 / The weight of radiators does not include water and packaging

Technical information

Material	steel pipes ø 26 mm
	steel profiles D35 × 41 mm
Connection threads	4×G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes	18+1, 28+2, 36+3, 41+3

Modification options

Surface treatment	colour
Height range [mm]	615-1975 (increase of 40)
Length range [mm]	NO
Change of dimensions	additional charge
Electric version	YES (additional charge)
Standard connection (SK)	STANDARD
Middle connection (SM)	YES (additional charge)
Side connection (SB)	YES (additional charge)
One-sided into space fixing	YES (additional charge)

Type height (H) / length (L) [mm]

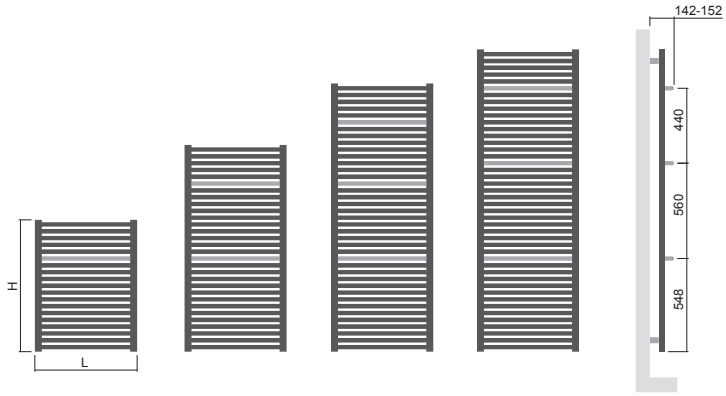

H	0775	H	1215	H	1575	H	1775
L	0500, 0600	L	0500, 0600	L	0500, 0600	L	0500, 0600

Mounting

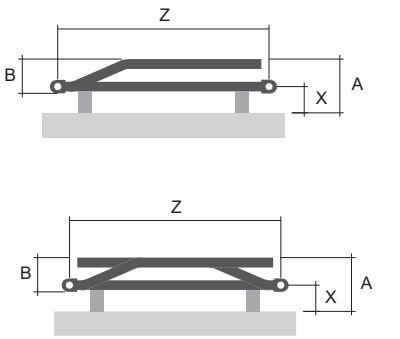

Type	X [mm]	A [mm]
Metal brackets	69-79	142-152

Connection options

The type of connection must be specified in the order; for more information see page 162, positions 13 and 14.