

# E-Saga E-Stela

In terms of design, E-Saga and E-Stela provide a straightforward solution to achieving maximum thermal efficiency. The heating foil responds immediately after the change request is entered. The intensive radiant energy can thus quickly, and without heat loss, fill the space with pleasant heat. The smooth surface lends itself to customized print motifs. The E-Saga is controlled via a wireless thermostat. The E-Stela requires the use of an external control device.

Material	steel / heating foil
Operating voltage	230 V AC, 50/60 Hz
Max. operating temperature	80 °C
Control / Regulation E-SAGA	thermostat / wireless control
Control / Regulation E-STELA	without regulation
Degree of protection	IPX4
Connection	via a 150 cm straight cord, terminated with a male plug



1. E-Saga

2. E-Stela



1. E-Saga - Fiery red RAL3002 [08] with a one-sided rail / 2. E-Stela - Ivory texture S08 [67] with a one-sided rail / 3. E-Saga - Black velvet matt S40 [51] with a one-sided rail

## Modification options

Surface treatment  
Height range [mm]  
Length range [mm]  
Electric version  
Printed motif  
Horizontal design

## E-Saga

colour  
NO  
NO  
STANDARD  
YES  
NO

## E-Stela

colour  
NO  
NO  
STANDARD  
YES  
NO

## Accessories

- Colour ref. chart page 115
- Bath. accessories page 100

## Connection Options



The type of connection must be specified in the order, for more information see page 112, positions 13 and 14.

# E-Saga



Height (H) Length (L) [mm]	Depth (B)	Weight	Water capacity	Temperature exponent	Output 75/65/20°C	Power input	Connection span (Z)	Electric RAL 9016	Printed motif
code	[mm]	[kg]	[l]	[-]	[W]	[W]	[mm]		
DCSI 1765 0456	25	21,2	-	-	-	600	-	✓	✓
DCSI 1765 0606	25	27,4	-	-	-	900	-	✓	✓

For ordering procedure see page 112 / The weight of radiators does not include water and packaging / The thermostat and receiver are part of the unit and cannot be sold separately.

# E-Stela




Height (H) Length (L) [mm]	Depth (B)	Weight	Water capacity	Temperature exponent	Output 75/65/20°C	Power input	Connection span (Z)	Electric RAL 9016	Printed motif
code	[mm]	[kg]	[l]	[-]	[W]	[W]	[mm]		
DESI 1765 0456	25	22,1	-	-	-	600	-	✓	✓
DESI 1765 0606	25	28,9	-	-	-	900	-	✓	✓

For ordering procedure see page 112 / The weight of radiators does not include water and packaging

## Type height (H) / length (L) [mm]

### E-Saga / E-Stela

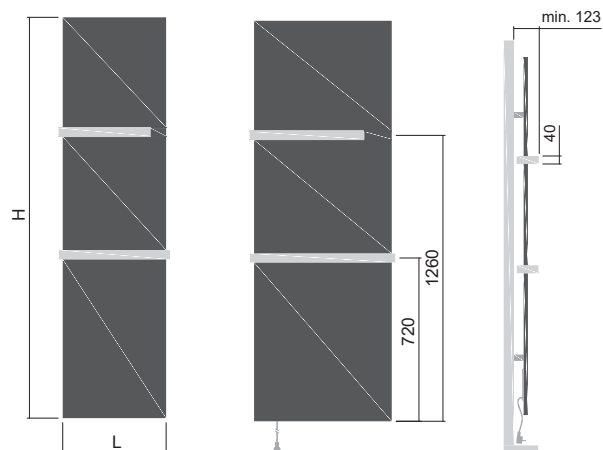

H: 1765  
L: 0456

H: 1765  
L: 0606

Option of adding rails:  
E-Saga 2 rails  
E-Stela 1 rail


## Mounting



Type  
Metal brackets  
A [mm]  
65-75

## Rails

### E-Saga / E-Stela




#### One-sided brushed stainless steel rails

Length [mm]	Code
456	O15MN81-70
606	O15MN81-71

#### One-sided polished stainless steel rail

Length [mm]	Code
456	O15MN87-70
606	O15MN87-71



#### Two-sided brushed stainless steel rails

Length [mm]	Code
456	O15MN81-72
606	O15MN81-73

#### Two-sided polished stainless steel rail

Length [mm]	Code
456	O15MN87-72
606	O15MN87-73

#### Two-sided rail - painted RAL 9016

Length [mm]	Code
456	O15MN01-72
606	O15MN01-73

Painted rails are also available in colour variations as per the ISAN colour chart at an extra charge.

## Thermostat (E-SAGA)



### RCBTH Wireless programmable thermostat (colour White)

The thermostat and receiver are factory paired.  
The thermostat can control up to 5 receivers.

[View the product video](#)

