

Rytmo

Rytmo with hooks

The Rytmo opens up a third dimension for drying. Hot water heats up the entire unit, including the practical hinged racks with magnets to hold them in place. The unit can be utilized both in central heating systems and for electric heating with an installed heating rod. A chrome version including a cover with practical hooks is also available. This high-performance domestic helper comes in four basic sizes and a wide range of colour designs as per the ISAN Colour Reference Chart.

| | |
|---------------------------------------|---|
| Material | steel profiles D35×41 mm steel pipes Ø 26 mm |
| Connection threads | 4×G1/2" |
| Testing overpressure | 0,65 MPa |
| Max. op. overpressure | 0,5 MPa |
| Max. op. temperature | 75°C |
| Number of pipes | 11, 17, 22, 25 |
| The load capacity of the hinged shelf | max. 13 kg |



1. Rytmo with a middle connection - Snow/traffic white RAL 9016 [01] / 2. Rytmo with hooks, middle connection - Antique gold S36 [48] / 3. Rytmo electric with hooks, reg. Rio chrome - Aquamarine S29 [23]




Modification options

| | |
|-----------------------------|----------------------------|
| Surface treatment | colour |
| Height range [mm] | NO |
| Length range [mm] | NO |
| Electric version | YES (additional charge) |
| Standard connection (SK) | STANDARD |
| Middle connection (SM) | YES (no additional charge) |
| Side connection (SB) | NO |
| One-sided into space fixing | NO |


Rytmo / Rytmo with hooks

| | |
|----------------------------|--|
| colour | |
| NO | |
| NO | |
| YES (additional charge) | |
| STANDARD | |
| YES (no additional charge) | |
| NO | |
| NO | |

Accessories

-  Electric regulators page 108
-  Thermostatic packs page 102
-  Colour ref. chart page 115

Connection Options

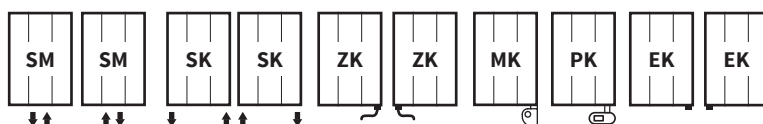

The type of connection must be specified in the order; for more information see page 112, positions 13 and 14.

Rytmo



| Height (H) Length (L) [mm] | Depth (B) | Weight | Water capacity | Temperature exponent | Output 75/65/20°C | Power input Z heat. rod, Mini PW, Vision | Power input Solo, Rio, Neo | Connection span (Z) | White colour RAL 9016 | Electric |
|----------------------------|-----------|--------|----------------|----------------------|-------------------|--|----------------------------|---------------------|-----------------------|----------|
| code | [mm] | [kg] | [l] | [-] | [W] | [W] | [W] | [mm] | | |
| DRTM 0775 0600 | 35/295 | 9,3 | 5,7 | 1,275 | 345 | 300 | 400 | 559 | ✓ | ✓ |
| DRTM 1215 0600 | 35/295 | 11,3 | 7,1 | 1,286 | 558 | 600 | 600 | 559 | ✓ | ✓ |
| DRTM 1575 0600 | 35/295 | 14,4 | 9,3 | 1,296 | 745 | 700 | 800 | 559 | ✓ | ✓ |
| DRTM 1775 0600 | 35/295 | 16,8 | 10,7 | 1,326 | 778 | 800 | 800 | 559 | ✓ | ✓ |

Rytmo with hooks




| Height (H) Length (L) [mm] | Depth (B) | Weight | Water capacity | Temperature exponent | Output 75/65/20°C | Power input Z heat. rod, Mini PW, Vision | Power input Solo, Rio, Neo | Connection span (Z) | White colour RAL 9016 | Electric |
|----------------------------|-----------|--------|----------------|----------------------|-------------------|--|----------------------------|---------------------|-----------------------|----------|
| code | [mm] | [kg] | [l] | [-] | [W] | [W] | [W] | [mm] | | |
| DRTH 0775 0600 | 39/295 | 9,3 | 5,7 | 1,275 | 345 | 300 | 400 | 559 | ✓ | ✓ |
| DRTH 1215 0600 | 39/295 | 11,3 | 7,1 | 1,286 | 558 | 600 | 600 | 559 | ✓ | ✓ |
| DRTH 1575 0600 | 39/295 | 14,4 | 9,3 | 1,296 | 745 | 700 | 800 | 559 | ✓ | ✓ |
| DRTH 1775 0600 | 39/295 | 16,8 | 10,7 | 1,326 | 778 | 800 | 800 | 559 | ✓ | ✓ |

For ordering procedure see page 112 / The weight of radiators does not include water and packaging.


Type height (H) / length (L) [mm]

Rytmo

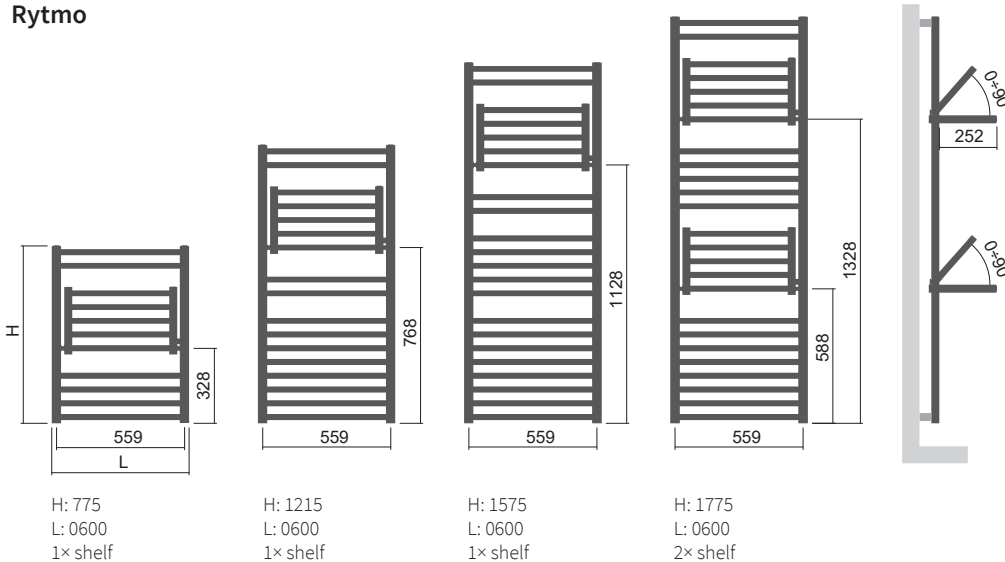


Mounting

Rytmo




| Type | X [mm] | A [mm] |
|----------------|--------|--------|
| Metal brackets | 58-68 | 75-85 |

Rytmo with hooks

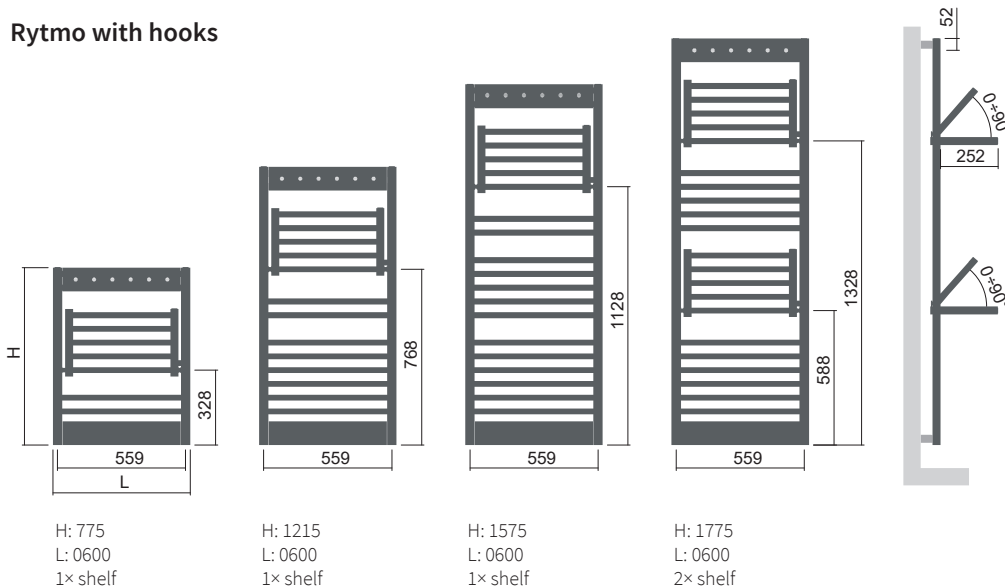

Rytmo with hooks



| Type | X [mm] | A [mm] |
|----------------|--------|--------|
| Metal brackets | 58-68 | 79-89 |

View the product video

