

Club Edge



The cubist form of the profiles placed on a pair of side rails will find its use in modern loft -type interiors by smoothly interconnecting individual open spaces.

Material	steel profiles 30×30 mm
Connection threads	4×G1/2"
Testing overpressure	1,3 MPa
Max. op. overpressure	1,0 MPa
Max. op. temperature	110 °C
Number of pipes	21, 25, 31



1.

Club Edge






1. Club Edge - lava ash S33 [27] / 2. Club Edge - aquamarine S29 [23]

Modification options


Surface treatment	colour
Height range [mm]	606-1 998 (increase of 48)
Length range [mm]	400-1 000 (increase of 10)
Dimension changes	YES (additional charge of 30% ¹⁾)
Electric version	YES
Standard connection (SK)	STANDARD
Middle connection (SM)	YES (additional charge)
Side connection (SB)	NO
One-sided into space fixing	NO

Club Edge

Accessories

-  Colour ref. chart
-  Thermostatic packs
-  Electric regulators

Connection Options

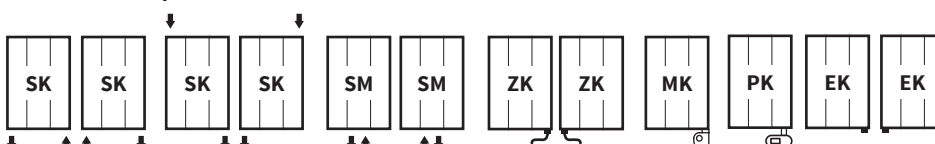

¹⁾ to the nearest larger standard dimension


Club Edge



Height (H) Length (L) [mm]	Depth (B)	Weight	Water capacity	Temperature exponent	Output 75/65/20°C	Power input Z heat rod, Mini PW, Vision	Power input Solo, Rio, Neo	Connection span (Z)	White colour RAL 9016	Electric
code	[mm]	[kg]	[l]	[°]	[W]	[W]	[W]	[mm]		
DCLE 1182 0600	59	22,2	10,7	1,244	724	700	800	562	✓	✓
DCLE 1470 0600	59	25,8	13,0	1,247	861	800	800	562	✓	✓
DCLE 1758 0600	59	32,2	15,9	1,247	1 061	1 000	1 000	562	✓	✓

The weight of radiators does not include water and packaging.

Type height (H) / length (L) [mm]

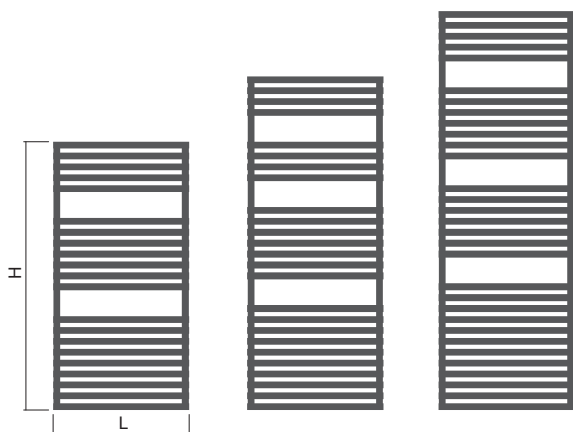


H: 1182
L: 0600

H: 1470
L: 0600

H: 1758
L: 0600

Mounting



Type	X [mm]	A [mm]
Metal brackets	55-65	100-110



Club Edge - lava ash S33 [27]

Club Edge