



Design Radiators by ISAN

Collom Light

An attractive vertical unit that is suitable for bathrooms as well as other rooms, while providing a fully functional architectural element with a subtle and discreet design. This model is also available with an optional print motif of your choice to transform the unit into an original item.



bath accessories



connection
sets



colour
ref. chart



Collom Light



| Code Height (H) / Length (L) [mm] | Depth (B) [mm] | Weight [kg] | Water capacity [l] | Temperature exponent [-] | Output 75/65/20°C [W] | Power input [W] | Connection span [mm] | White colour RAL 9016 [€] | Electric [€] | Printed motif [€] |
|---|----------------------|----------------|-----------------------|--------------------------------|-----------------------------|-----------------------|----------------------------|---------------------------------|-----------------|----------------------|
| DCLL 1800 0274 | 38 | 12,5 | 3,1 | 1,281 | 550 | - | 50 | ✓ | - | ✓ |
| DCLL 1800 0442 | 38 | 19,5 | 5,1 | 1,281 | 866 | - | 50 | ✓ | - | ✓ |
| DCLL 1800 0610 | 38 | 26,5 | 7,0 | 1,281 | 1183 | - | 50 | ✓ | - | ✓ |

The weight of radiators does not include water and packaging.

Technical information


| | |
|-----------------------------|---|
| Material | steel profiles Ø 28 mm steel profiles 50×10 mm |
| Connection threads | 2 × G1/2" |
| Testing overpressure | 0,65 MPa |
| Max. operating overpressure | 0,5 MPa |
| Max. operating temperature | 110 °C |
| Poččet profilů | 5, 8, 11 |

Modification options

| | |
|-----------------------------|--------------------------------------|
| Surface treatment | colour |
| Height range [mm] | 500-2000 (increase of 10) |
| Length range [mm] | 274-946 (increase of 56) |
| Change of dimensions | additional charge 30 % ¹⁾ |
| Electric version | NO |
| Standard connection (SK) | NO |
| Middle connection (SM) | STANDARD |
| Side connection (SB) | YES (additional charge) |
| One-sided into space fixing | NO |

¹⁾ to the nearest larger standard dimension

Type height (H) / length (L) [mm]

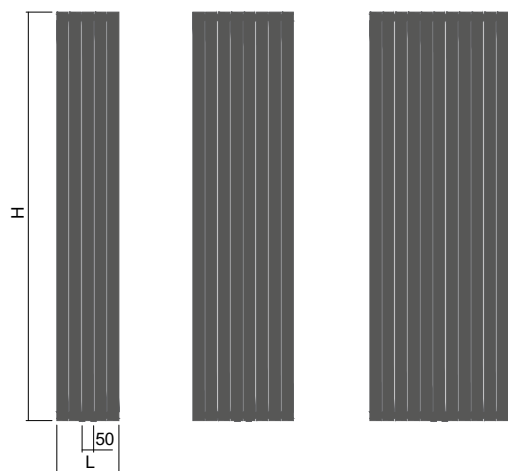


H 1800
L 0274

H 1800
L 0442


H 1800
L 0610

Mounting




| | | |
|----------------|--------|--------|
| Type | X [mm] | A [mm] |
| Metal brackets | 54-64 | 77-87 |

Connection options



The type of connection must be specified in the order

Madla



Two-sided brushed stainless steel rail

| Length [mm] | Code |
|-------------|------------|
| 298 | O15MN81-05 |
| 450 | O15MN81-06 |
| 602 | O15MN81-07 |

Two-sided polished stainless steel rail

| Length [mm] | Code |
|-------------|------------|
| 298 | O15MN87-05 |
| 450 | O15MN87-06 |
| 602 | O15MN87-07 |

Two-sided rail - painted RAL 9016

| Length [mm] | Code |
|-------------|------------|
| 298 | O15MN01-05 |
| 450 | O15MN01-06 |
| 602 | O15MN01-07 |

Painted rails are also available in colour variations as per the ISAN colour chart at an extra charge.