


# Kandavu




This stylishly simple radiator is the perfect fit for any room. It can be painted in any color, allowing you to customize it to your exact preferences and design specifications. The vertical positioning of the steel profiles also makes for effortless maintenance.

Material	steel profiles D35×41 mm / steel pipes Ø 26 mm
Connection threads	2× G1/2"
Testing overpressure	1,3 MPa
Max. op. overpressure	1,0 MPa
Max. op. temperature	110°C
Number of pipes	15

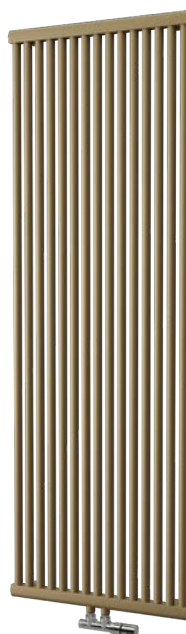

1.

Kandavu

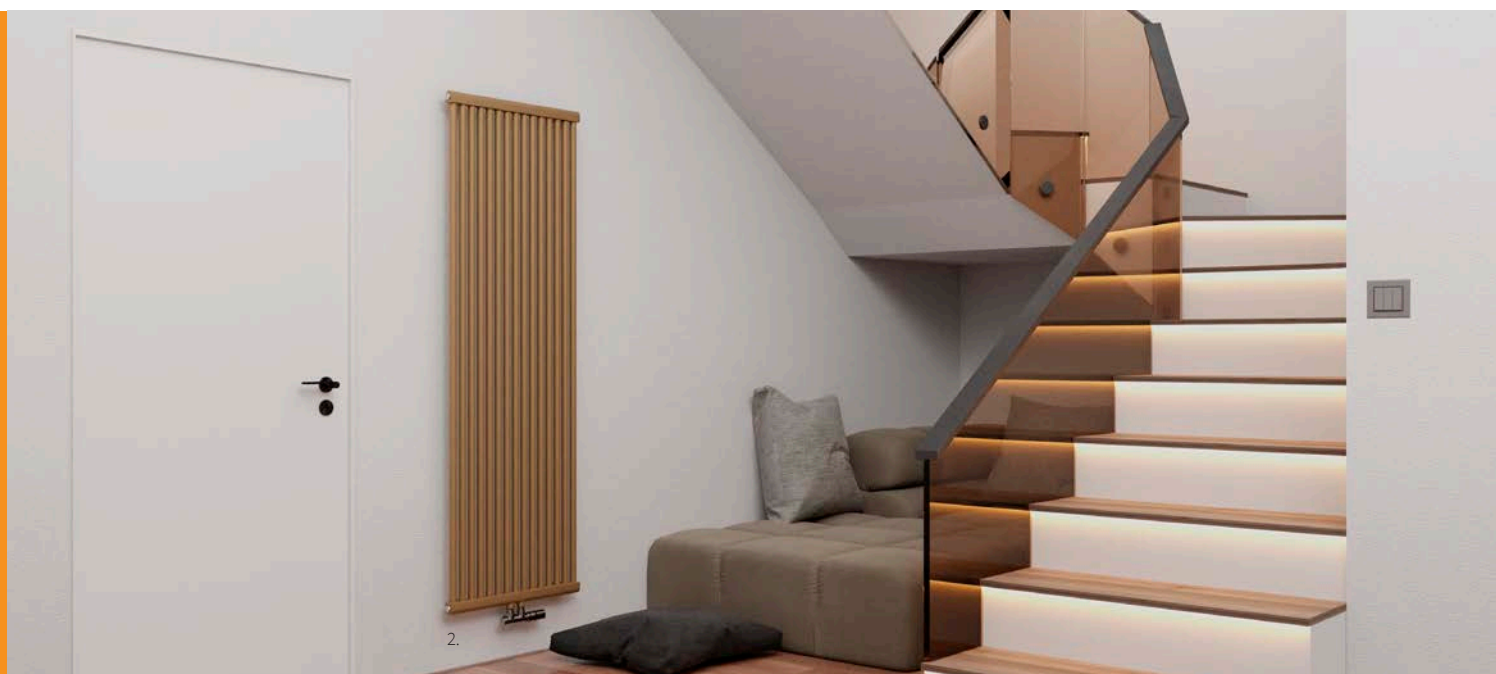

2.

1. Kandavu – sandstone S13 [72]/ 2. Kandavu - sandstone S13 [72]

## Modification options


Surface treatment	colour
Height range [mm]	600-2000 (increase of 10)
Length range [mm]	240-960 (increase of 40)
Dimension changes	YES (additional charge of 30% <sup>1)</sup> )
Electric version	NO
Middle connection (SM)	STANDARD
Side connection (SB)	NO
One-sided into space fixing	NO
Bevel	YES (additional charge of 50 %)

## Kandavu

## Accessories

- Colour ref. chart
- Thermostatic packs

## Connection Options



<sup>1)</sup> to the nearest larger standard dimension

# Kandavu




Height (H) Length (L) [mm]	Depth (B)	Weight	Water capacity	Temperature exponent	Output 75/65/20°C	Power input Z heat rod, Mini PW, Vision	Power input Solo, Rio, Neo	Connection span (Z)	White colour RAL 9016	Electric
code	[mm]	[kg]	[l]	[-]	[W]	[W]	[W]	[mm]		
<b>DKAN 1800 0600</b>	<b>35</b>	<b>17,3</b>	<b>13,1</b>	<b>1,276</b>	<b>1186</b>	-	-	<b>50</b>	✓	-


The weight of radiators does not include water and packaging.

## Type height (H) / length (L) [mm]

## Mounting

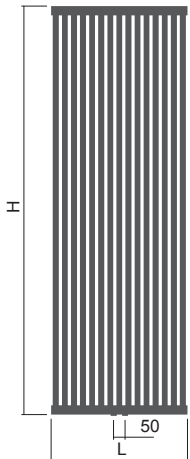

H: 1800  
L: 0600



Type	X [mm]	A [mm]
<b>Metal brackets</b>	<b>58-68</b>	<b>75-85</b>



Kandavu - sandstone S13 [72]