

The Nix will be appreciated mainly by owners of family homes, cottages and chalets. They are also sure to find their use in sports or workplace dressing rooms, in wellness centres, etc. The robust steel frame features a number of practical elements designed for cloth drying. Ideal for thorough drying of jackets, gloves, hats, walking or work footwear, as well as sportswear for leisure or outdoor activities. It is also available in models designed exclusively for electric operation, not requiring any construction work prior to installation.

Material	steel profiles 40×40 mm steel profiles horizontal 25×25 mm steel pipes ø 25 mm
Connection threads	4×G1/2"
Testing overpressure	0,65 MPa
Max. op. overpressure	0,5 MPa
Max. op. temperature	95 °C
Number of pipes	12
The load capacity of the hinged shelf	max. 13 kg



1.



1. Nix - snow white RAL 9016 [01] / 2. Nix - yellow RAL 1018 [99]

Modification options


Surface treatment	colour
Height range [mm]	NO
Length range [mm]	NO
Electric version	YES
Universal connection (SU)	STANDARD
Side connection (SB)	YES (additional charge)
One-sided into space fixing	NO

Nix

Accessories

- Colour ref. chart
- Thermostatic packs
- Electric regulators

Connection Options

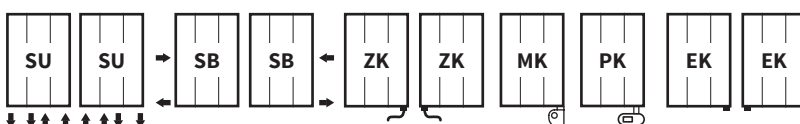




Height (H)	Length (L) [mm]	Depth (B)	Weight	Water capacity	Temperature exponent	Output 75/65/20°C	Power input Z heat rod, Mini PW, Vision	Power input Solo, Rio, Neo	Connection span (Z)	White colour RAL 9016	Electric
code	[mm]	[mm]	[kg]	[l]	[-]	[W]	[W]	[W]	[mm]		
DTNR 1750 1000		380	36,0	14,0	1,005	995	1 000	1 000	50/960	✓	✓


The weight of radiators does not include water and packaging.

Type height (H) / length (L) [mm]

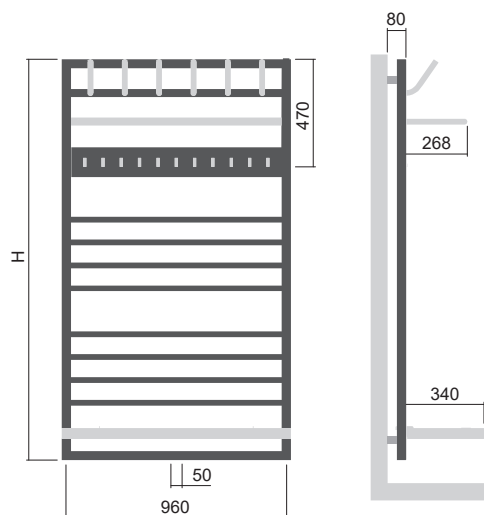

H: 1750
L: 1000

Mounting

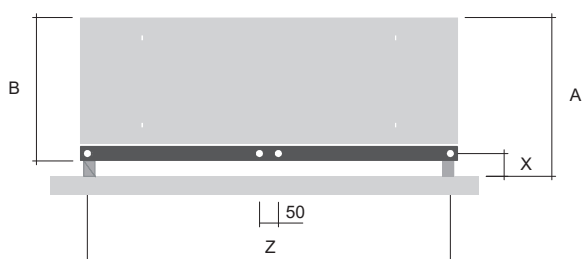

Type	X [mm]	A [mm]
Metal brackets	60-70	420-430



Nix - snow white RAL 9016 [01]

