



Design Radiators by ISAN

Ori Open

The simplicity of the Ori Open heater complements the modern design of Ori radiators. It features practical openings which can be used to warm up fabrics without having to use a rail. The thin design using a minimum amount of water reduces the consumption of heat energy.




bath accessories
→ 145



connection sets
→ 146



colour ref. chart
→ 159

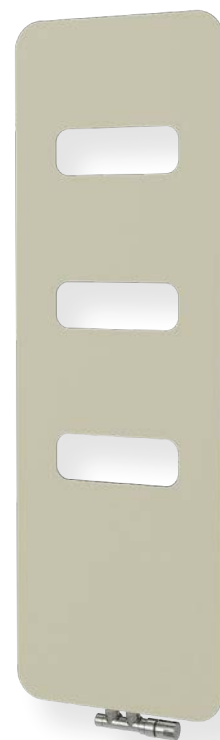



Ori Open



Code Height (H) / Length (L) [mm]	Depth (B) [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [-]	Output 75/65/20°C [W]	Power input [W]	Connection span [mm]	Colour structure	Electric
DORO 1490 0490	5	16,1	0,9	1,291	662	-	50	✓	-
DORO 1790 0490	5	18,8	1,1	1,288	788	-	50	✓	-

For ordering procedure see page 160 / The weight of radiators does not include water and packaging / The depth of Ori Open radiators at the connection point is 45 mm / The Ori Open radiator is only available in colour variations with a structured surface, see the colour chart


Technical information

Material	steel cover
Connection threads	2× G1/2"
Testing overpressure	0,78 MPa
Max. operating overpressure	0,6 MPa
Max. operating temperature	90 °C

Modification options


Surface treatment	colour structure
Height range [mm]	NO
Length range [mm]	NO
Electric version	NO
Standard connection (SK)	NO
Middle connection (SM)	STANDARD
Side connection (SB)	NO
One-sided into space fixing	NO

Type height (H) / length (L) [mm]




H 1490	H 1790
L 0490	L 0490

Mounting



Type	X [mm]	A [mm]
Metal brackets	45-55	75-85

Connection options



The type of connection must be specified in the order; for more information see page 160, positions 13 and 14.



Ultra-thin design