

# Quadrat Quadrat Plus



The square profiles of Quadrat radiators conform to contemporary trends in interior design. Their originality will be particularly emphasised by different colour variations.

Material	steel profiles 40×40 mm steel profiles 25×25 mm
Connection threads	4×G1/2"
Testing overpressure	0,65 MPa
Max. op. overpressure	0,5 MPa
Max. op. temperature	110 °C
Number of pipes Quadrat	21, 24, 29
Number of pipes Quadrat Plus	18, 26



1.

2.

Quadrat / Quadrat Plus



3.

1. Quadrat - light grey S37 [49] / 2. Quadrat Plus - ivory S08 [67] / 3. Quadrat electric with reg. Vision - snow white RAL 9016 [01]

## Modification options

Surface treatment
Height range [mm]
Length range [mm]
Dimension changes
Electric version
Standard connection (SK)
Middle connection (SM)
Universal connection (SU)
Side connection (SB)
One-sided into space fixing

## Quadrat

colour
305-1 955 (increase of 50)
300-1 000 (increase of 10)
YES (additional charge of 30% <sup>1)</sup> )
YES
STANDARD
YES (additional charge)
NO
YES (additional charge)
NO


## Quadrat Plus

colour
NO
500, 600
YES (additional charge of 30% <sup>1)</sup> )
YES
NO
STANDARD
YES (additional charge)
NO

## Accessories

- Colour ref. chart
- Thermostatic packs
- Electric regulators

## Connection Options Quadrat

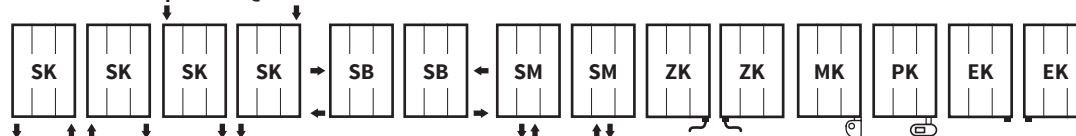

<sup>1)</sup> to the nearest larger standard dimension.

# Quadrat



Height (H) Length (L) [mm]	Depth (B)	Weight	Water capacity	Temperature exponent	Output 75/65/20°C	Power input Z heat. rod, Mini PW, Vision	Power input Solo, Rio, Neo	Connection span (Z)	White colour RAL 9016	Electric
code	[mm]	[kg]	[l]	[-]	[W]	[W]	[W]	[mm]		
DQUA 1255 0500	40	15,0	7,7	1,269	582	600	600	460	✓	✓
DQUA 1255 0600	40	17,3	8,7	1,269	680	700	600	560	✓	✓
DQUA 1505 0500	40	15,1	9,3	1,270	692	700	600	460	✓	✓
DQUA 1505 0600	40	17,3	10,5	1,270	809	800	800	560	✓	✓
DQUA 1755 0500	40	20,5	10,7	1,272	802	800	800	460	✓	✓
DQUA 1755 0600	40	23,7	12,1	1,272	937	900	1000	560	✓	✓

# Quadrat Plus




Height (H) Length (L) [mm]	Depth (B)	Weight	Water capacity	Temperature exponent	Output 75/65/20°C	Power input Z heat. rod, Mini PW, Vision	Power input Solo, Rio, Neo	Connection span (Z)	White colour RAL 9016	Electric
code	[mm]	[kg]	[l]	[-]	[W]	[W]	[W]	[mm]		
DQUP 1245 0600	40	15,2	9,7	1,271	699	700	600	50/560	✓	✓
DQUP 1745 0600	40	20,8	13,2	1,254	965	1000	1 000	50/560	✓	✓


The weight of radiators does not include water and packaging.

## Type height (H) / length (L) [mm]

### Quadrat

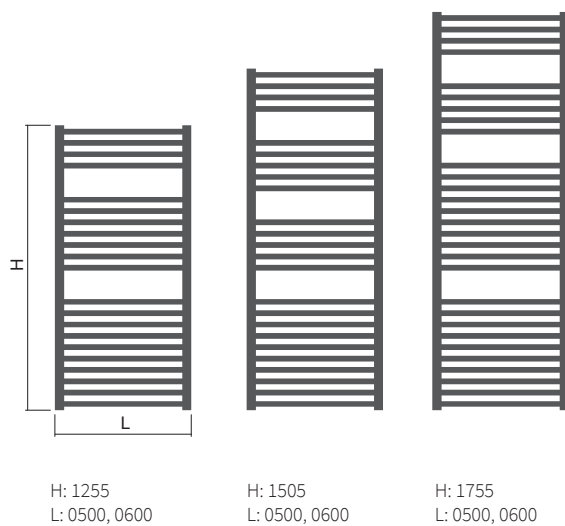


### Quadrat Plus

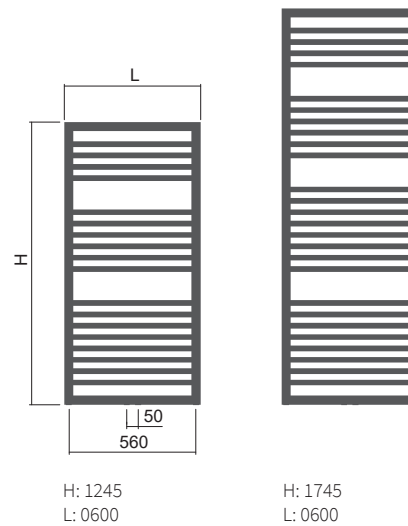

Quadrat / Quadrat Plus


## Mounting

### Quadrat



Type	X [mm]	A [mm]
Metal brackets	60-70	80-90

### Quadrat Plus



Type	X [mm]	A [mm]
Metal brackets	60-70	80-90

## Connection Options Quadrat Plus

