



**Design Radiators** by ISAN

# Quadrat

The square profiles of Quadrat radiators conform to contemporary trends in interior design. Their originality will be particularly emphasised by different colour variations.



connection  
sets



electric  
regulators



colour  
ref. chart





| Code<br>Height (H) / Length (L)<br>[mm] | Depth<br>(B)<br>[mm] | Weight<br>[kg] | Water capacity<br>[l] | Temperature<br>exponent<br>[-] | Output<br>75/65/20°C<br>[W] | Power<br>input<br>[W] | Connection<br>span<br>[mm] | White colour<br>RAL 9016<br>[€] | Electric<br>[€] |
|---|----------------------|----------------|-----------------------|--------------------------------|-----------------------------|-----------------------|----------------------------|---------------------------------|-----------------|
| DQUA 1255 0500                          | 40                   | 15,0           | 7,7                   | 1,239                          | 517                         | 600                   | 460                        | ✓                               | ✓               |
| DQUA 1255 0600                          | 40                   | 17,3           | 8,7                   | 1,239                          | 604                         | 600                   | 560                        | ✓                               | ✓               |
| DQUA 1505 0500                          | 40                   | 15,1           | 9,3                   | 1,270                          | 692                         | 600                   | 460                        | ✓                               | ✓               |
| DQUA 1505 0600                          | 40                   | 17,3           | 10,5                  | 1,270                          | 809                         | 800                   | 560                        | ✓                               | ✓               |
| DQUA 1755 0500                          | 40                   | 20,5           | 10,7                  | 1,272                          | 802                         | 800                   | 460                        | ✓                               | ✓               |
| DQUA 1755 0600                          | 40                   | 23,7           | 12,1                  | 1,272                          | 937                         | 1000                  | 560                        | ✓                               | ✓               |

The weight of radiators does not include water and packaging.

## Technical information


|                             |  |
|-----------------------------|--|
| Material                    | steel profiles 40×40 mm<br>steel profiles 25×25 mm |
| Connection threads          | 4×G1/2"  |
| Testing overpressure        | 0,65 MPa   |
| Max. operating overpressure | 0,5 MPa  |
| Max. operating temperature  | 110 °C   |
| Počet profilů Quadrat       | 21, 24, 29   |

## Modification options

|                             |                                      |
|-----------------------------|--------------------------------------|
| Surface treatment           | colour                               |
| Height range [mm]           | 305-1 955 (increase of 50)           |
| Length range [mm]           | 300-1 000 (increase of 10)           |
| Change of dimensions        | additional charge 30 % <sup>1)</sup> |
| Varianta kombi              | YES                                  |
| Standard connection (SK)    | STANDARD                             |
| Middle connection (SM)      | YES (additional charge)              |
| Univerzální připojení (SU)  | NO                                   |
| Side connection (SB)        | YES (additional charge)              |
| One-sided into space fixing | NO                                   |


<sup>1)</sup> to the nearest larger standard dimension

## Type height (H) / length (L) [mm]

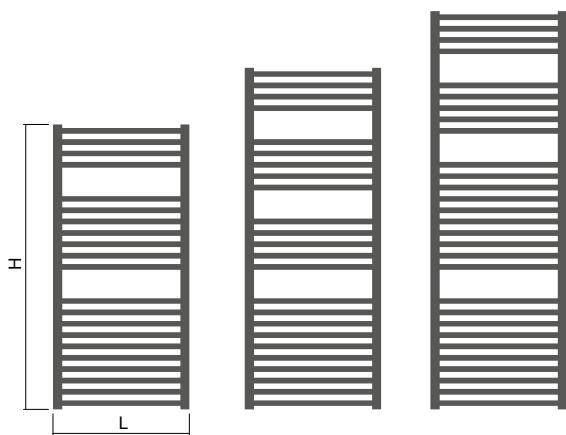


|              |              |              |
|--------------|--------------|--------------|
| H 1255       | H 1505       | H 1755       |
| L 0500, 0600 | L 0500, 0600 | L 0500, 0600 |

## Mounting



|                |        |        |
|----------------|--------|--------|
| Type           | X [mm] | A [mm] |
| Metal brackets | 60-70  | 80-90  |

## Connection options



The type of connection must be specified in the order