


# Solar




This modern unit features a lightweight perforated cover, housing a powerful radiator with an optional central heating connection. In the color of your choice, it is sure to add an element of style to your interior.

Material	steel profiles 30×30 mm steel pipes Ø 28 mm
Connection threads	2×G1/2"
Testing overpressure	1,3 MPa
Max. op. overpressure	1,0 MPa
Max. op. temperature	95 °C

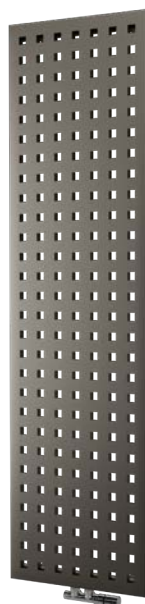

1.

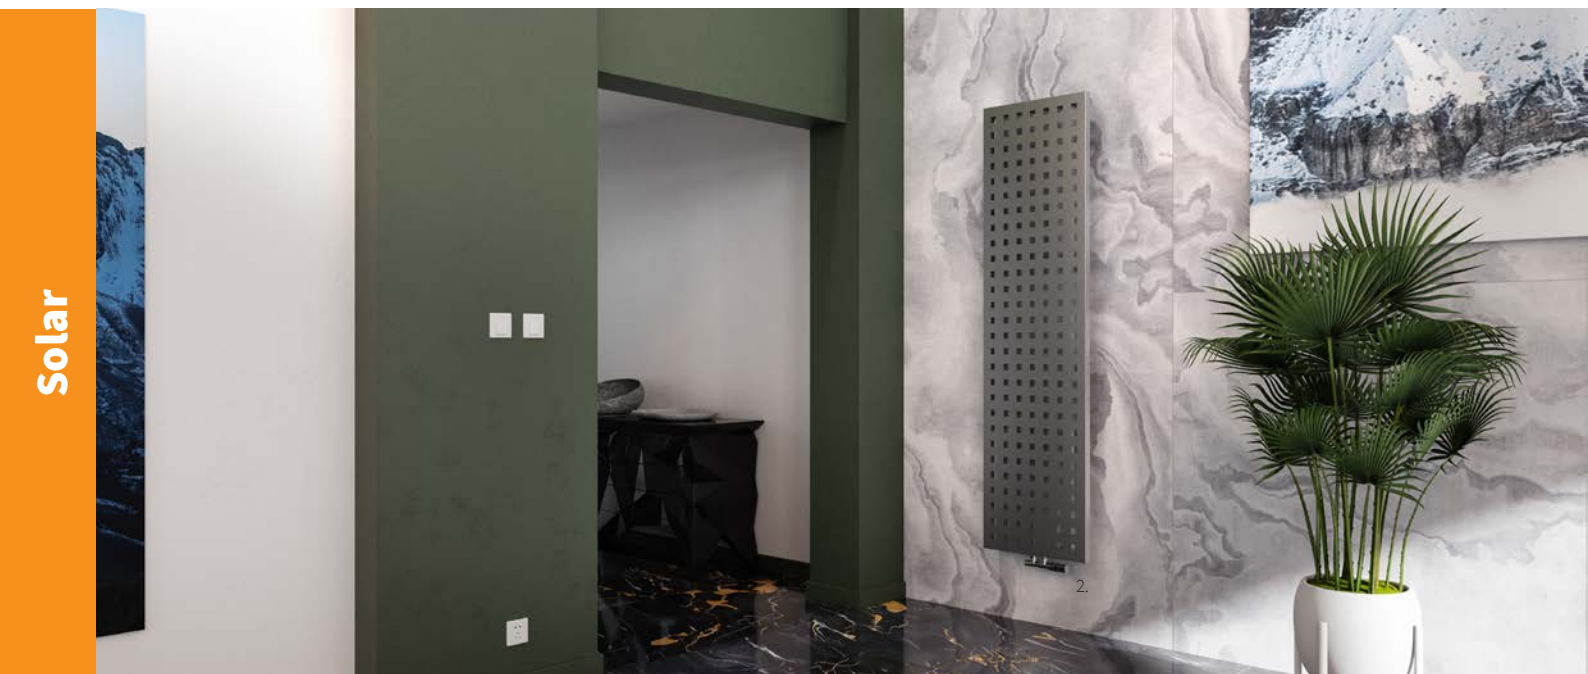




1. Solar – lava ash S33 [27] / 2. Solar – silver S05 [64]

## Modification options


Surface treatment	colour
Height range [mm]	609-1995 (increase of 63)
Length range [mm]	288-981 (increase of 63)
Dimension changes	YES (additional charge of 30 % <sup>1)</sup> )
Electric version	NO
Middle connection (SM)	STANDARD
Side connection (SB)	YES (additional charge)
One-sided into space fixing	NO

## Solar

## Accessories

-  Colour ref. chart
-  Bath. accessories
-  Thermostatic packs

## Connection Options




<sup>1)</sup> to the nearest larger standard dimension



Height (H) Length (L) [mm]	Depth (B)	Weight	Water capacity	Temperature exponent	Output 75/65/20°C	Power input Z heat rod, Mini PW, Vision	Power input Solo, Rio, Neo	Connection span (Z)	White colour RAL 9016	Electric
code	[mm]	[kg]	[l]	[°]	[W]	[W]	[W]	[mm]		
DSOL 1206 0288	59	14,1	4,6	1,273	377	-	-	50	✓	-
DSOL 1206 0477	59	21,9	7,4	1,273	607	-	-	50	✓	-
DSOL 1206 0603	59	27,8	9,2	1,273	757	-	-	50	✓	-
DSOL 1806 0288	59	20,5	6,7	1,273	540	-	-	50	✓	-
DSOL 1806 0477	59	32,0	10,9	1,273	890	-	-	50	✓	-
DSOL 1806 0603	59	39,5	13,6	1,273	1128	-	-	50	✓	-

The weight of radiators does not include water and packaging.


## Type height (H) / length (L) [mm]

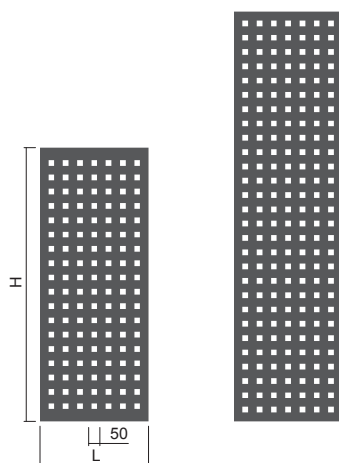

H: 1206  
L: 0288, 0477, 0603

H: 1806  
L: 0288, 0477, 0603

## Mounting



Type	X [mm]	A [mm]
Metal brackets	54-64	99-109



Solar – lava ash S33 [27]

