



Design Radiators by ISAN

Solar

This modern unit features a lightweight perforated cover, housing a powerful radiator with an optional central heating connection. In the color of your choice, it is sure to add an element of style to your interior.




connection
sets



electric
regulators



colour
ref. chart

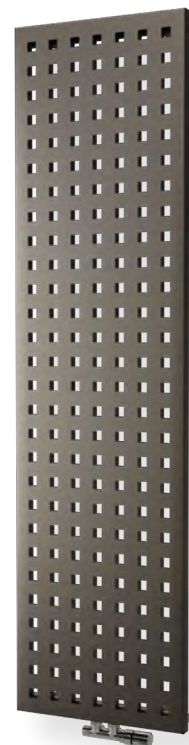



Code Height (H) /Length (L) [mm]	Depth (B) [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [-]	Output 75/65/20°C [W]	Power input [W]	Connection span [mm]	White colour RAL 9016 [€]	Electric [€]
DSOL 1206 0288	59	14,1	4,6	1,273	377	-	50	✓	-
DSOL 1206 0477	59	21,9	7,4	1,273	607	-	50	✓	-
DSOL 1206 0603	59	27,8	9,2	1,273	757	-	50	✓	-
DSOL 1806 0288	59	20,5	6,7	1,273	540	-	50	✓	-
DSOL 1806 0477	59	32,0	10,9	1,273	890	-	50	✓	-
DSOL 1806 0603	59	39,5	13,6	1,273	1128	-	50	✓	-

The weight of radiators does not include water and packaging.

Technical information


Material	steel profiles 30×30 mm steel profiles Ø 28 mm
Connection threads	2×G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	95 °C

Modification options

Surface treatment	colour
Height range [mm]	609-1995 (increase of 63)
Length range [mm]	288-981 (increase of 63)
Change of dimensions	additional charge 30 % ¹
Electric version	NO
Middle connection (SM)	STANDARD
Side connection (SB)	YES (additional charge)
One-sided into space fixing	NO
One-sided into space fixing	NO


¹⁾ to the nearest larger standard dimension

Type height (H) / length (L) [mm]

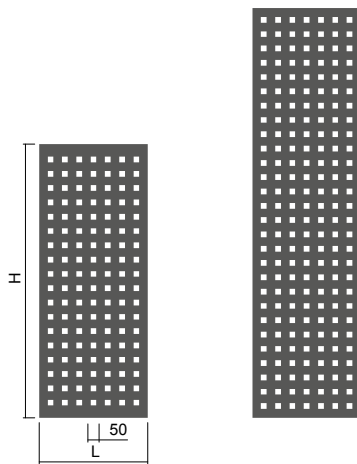


H 1206	H 1806
L 0288, 0477, 0603	L 0288, 0477, 0603

Mounting



Type	X [mm]	A [mm]
Metal brackets	54-64	99-109

Connection options



The type of connection must be specified in the order