

Tongia



The classic Tongia towel rail stands out with its simple design. Its size makes this heating unit a good choice even for small bathrooms. It is suitable for both hot water and combined heating as well as for fully electric operation.

Material	steel profiles 30×30 mm steel pipes Ø 20 mm
Connection threads	4×G1/2"
Testing overpressure	1,3 MPa
Max. op. overpressure	1,0 MPa
Max. op. temperature	110 °C
Number of pipes	15, 24, 32



1.

Tongia



2.






1. Tongia – sapphire S30 [24] / 2. Tongia – black velvet S40 [51]

Modification options


Surface treatment	colour
Height range [mm]	335-2175 (increase of 40)
Length range [mm]	300-1000 (increase of 10)
Dimension changes	YES (additional charge of 30 % ¹⁾)
Electric version	YES
Standard connection (SK)	STANDARD
Middle connection (SM)	YES (additional charge)
Side connection (SB)	YES (additional charge)
One-sided into space fixing	YES (additional charge)
Bevel	YES (additional charge of 50 %)

Tongia

Accessories

-  Colour ref. chart
-  Thermostatic packs
-  Electric regulators

Connection Options

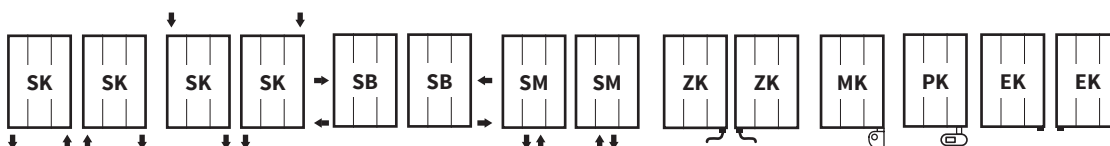

¹⁾ to the nearest larger standard dimension


Tongia




Height (H) Length (L) [mm]	Depth (B)	Weight	Water capacity	Temperature exponent	Output 75/65/20°C	Power input Z heat rod, Mini PW, Vision	Power input Solo, Rio, Neo	Connection span (Z)	White colour RAL 9016	Electric
code	[mm]	[kg]	[l]	[°]	[W]	[W]	[W]	[mm]		
DTON 0695 0500	30	5,7	2,6	1,244	312	300	400	470	✓	✓
DTON 0695 0600	30	6,6	3,0	1,244	365	400	400	570	✓	✓
DTON 1135 0500	30	9,2	4,2	1,254	512	500	600	470	✓	✓
DTON 1135 0600	30	10,6	4,8	1,254	600	600	600	570	✓	✓
DTON 1535 0500	30	12,3	5,7	1,263	703	700	800	470	✓	✓
DTON 1535 0600	30	14,1	6,4	1,263	823	800	800	570	✓	✓

The weight of radiators does not include water and packaging.

Type height (H) / length (L) [mm]

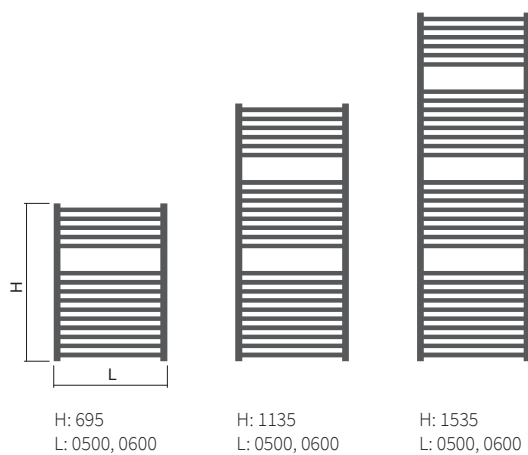

Mounting



Type	X [mm]	A [mm]
Metal brackets	88-98	73-83



Tongia – sapphire S30 [24]