



**Design Radiators** by ISAN

# Tongia

The classic Tongia towel rail stands out with its simple design. Its size makes this heating unit a good choice even for small bathrooms. It is suitable for both hot water and combined heating as well as for fully electric operation



connection  
sets



electric  
regulators



colour  
ref. chart





Code Height (H) / Length (L) [mm]	Depth (B) [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [-]	Output 75/65/20°C [W]	Power input [W]	Connection span [mm]	White colour RAL 9016 [€]	Electric [€]
DTON 0695 0500	30	5,7	2,6	1,244	312	400	470	✓	✓
DTON 0695 0600	30	6,6	3,0	1,244	365	400	570	✓	✓
DTON 1135 0500	30	9,2	4,2	1,254	512	600	470	✓	✓
DTON 1135 0600	30	10,6	4,8	1,254	600	600	570	✓	✓
DTON 1535 0500	30	12,3	5,7	1,263	703	800	470	✓	✓
DTON 1535 0600	30	14,1	6,4	1,263	823	800	570	✓	✓

The weight of radiators does not include water and packaging.

## Technical information


Material	steel profiles 30x30 mm steel profiles Ø 20 mm
Connection threads	4xG1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Počet profilů	15, 24, 32

## Modification options

Surface treatment	colour
Height range [mm]	335-2175 (increase of 40)
Length range [mm]	300-1000 (increase of 10)
Change of dimensions	additional charge 30 % <sup>1</sup>
Electric version	YES
Standard connection (SK)	STANDARD
Middle connection (SM)	YES (additional charge)
Side connection (SB)	YES (additional charge)
One-sided into space fixing	YES (additional charge)
Zkosení	YES (additional charge 50 %)

<sup>1</sup> to the nearest larger standard dimension

## Type height (H) / length (L) [mm]

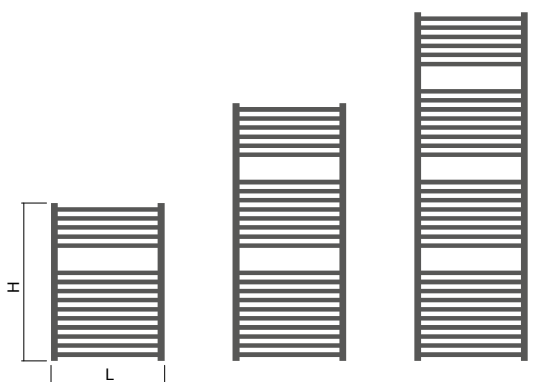


H 0695  
L 0500, 0600

H 1135  
L 0500, 0600


H 1535  
L 0500, 0600

## Mounting



Type	X [mm]	A [mm]
Metal brackets	88-98	73-83

## Connection options



The type of connection must be specified in the order