

Quadrat Sky Quadrat Sky Plus

The square shape of this unit is very attractive, while its design is suitable for any bathroom. The Quadrat Sky Plus option comes with an enclosed frame that will give the bathroom an original look.

	Quadrat Sky	Quadrat Sky Plus
Material	steel profiles 40×40 mm / steel profiles 25×25 mm	steel profiles 40×40 mm / steel profiles 25×25 mm
Connection threads	4×G1/2"	4×G1/2"
Testing overpressure	0,65 MPa	0,65 MPa
Max. op. overpressure	0,5MPa	0,5MPa
Max. op. temperature	110 °C	95 °C
Number of profiles	19, 22, 25	16, 24



1. Quadrat Sky



2. Quadrat Sky Plus






3.

1. Quadrat Sky - Pastel green mat RAL 6019 [K7] / 2. Quadrat Sky Plus - Snow/traffic white RAL 9016 [01] / 3. Quadrat Sky Plus electric with reg. Neo chrome - Window grey matt RAL 7040 MAT [K3]


Modification options

	Quadrat Sky	Quadrat Sky Plus
Surface treatment	colour	colour
Height range [mm]	305-1 955 (increase of 50)	NO
Length range [mm]	300-1 000 (increase of 10)	500, 600
Dimension changes	additional charge of 30 % ¹⁾	additional charge of 30 % ¹⁾
Electric version	YES (additional charge)	YES (additional charge)
Standard connection (SK)	STANDARD	NO
Middle connection (SM)	YES (additional charge)	NO
Universal connection (SU)	NO	STANDARD
Side connection (SB)	YES (additional charge)	YES (additional charge)

Accessories

-  Colour ref. chart page 115
-  Thermostatic packs page 102
-  Electric regulators page 108

Connection Options Quadrat Sky

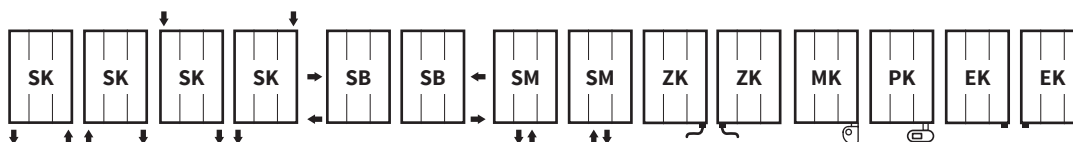

The type of connection must be specified in the order; for more information see page 112, positions 13 and 14, /¹⁾ to the nearest larger standard dimension

Quadrat Sky



Height (H) Length (L) [mm]	Depth (B)	Weight	Water capacity	Temperature exponent	Output 75/65/20°C	Power input Z heat. rod, Mini PW, Vision	Power input Solo, Rio, Neo	Connection span (Z)	White colour RAL 9016	Electric
code	[mm]	[kg]	[l]	[-]	[W]	[W]	[W]	[mm]		
DQUS 1255 0500	40	12,2	7,5	1,269	487	500	400	460	✓	✓
DQUS 1255 0600	40	14,0	8,5	1,269	566	600	600	560	✓	✓
DQUS 1505 0500	40	14,3	8,8	1,270	656	700	600	460	✓	✓
DQUS 1505 0600	40	16,3	10,0	1,270	761	800	800	560	✓	✓
DQUS 1755 0500	40	16,3	10,2	1,272	728	700	800	460	✓	✓
DQUS 1755 0600	40	18,6	11,4	1,272	844	800	800	560	✓	✓

Quadrat Sky Plus




Height (H) Length (L) [mm]	Depth (B)	Weight	Water capacity	Temperature exponent	Output 75/65/20°C	Power input Z heat. rod, Mini PW, Vision	Power input Solo, Rio, Neo	Connection span (Z)	White colour RAL 9016	Electric
code	[mm]	[kg]	[l]	[-]	[W]	[W]	[W]	[mm]		
DQSP 1245 0600	40	15,2	9,7	1,271	699	700	600	50/560	✓	✓
DQSP 1745 0600	40	20,8	13,2	1,254	965	1000	1000	50/560	✓	✓


For ordering procedure see page 112 / The weight of radiators does not include water and packaging.

Type height (H) / length (L) [mm]

Quadrat Sky

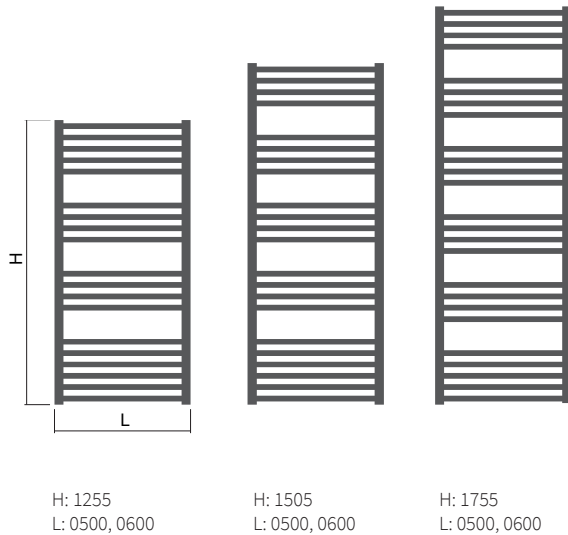


Quadrat Sky Plus

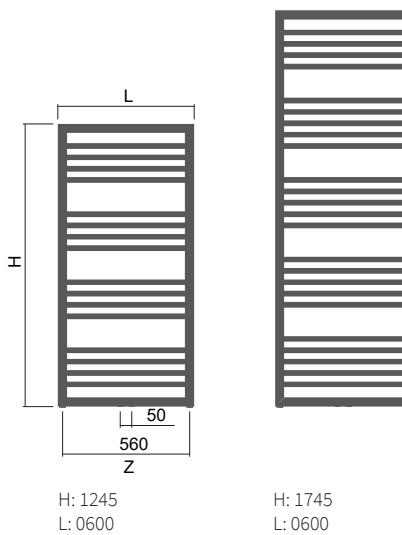

69 | Quadrat Sky / Plus


Mounting

Quadrat Sky



Type	X [mm]	A [mm]
Metal brackets	60-70	80-90

Quadrat Sky Plus



Type	X [mm]	A [mm]
Metal brackets	60-70	80-90

Connection Options Quadrat Sky Plus

