

# Coron

## Coron Double Horizontal

An unconventional subtle heating unit in a single vertical or double horizontal design. The Coron Double Horizontal model allows for a wall or floor installation using small stands. The oval shape also makes it possible to store bath towels on/in the unit to ensure they stay warm.

Material	steel pipes Ø 60 mm
Connection threads	2xG1/2"
Testing overpressure	1,3 MPa
Max. op. overpressure	1,0 MPa
Max. operating temperature	120°C



44 | Coron / Double Horizontal



1. Coron Double Horizontal - Gold olive texture S28 [22] / 2. Coron - Silver metallic S05 [64] / 3. Coron - Black RAL 9005 [19]



### Modification options

	Coron
Surface treatment	colour
Height range [mm]	1 000-1 800 (increase of 100)
Length range [mm]	NO
Dimension changes	YES
Electric version	NO
Middle connection (SM)	STANDARD
Side connection (SB)	NO
One-sided into space fixing	NO


### Coron Double Horizontal

	Coron Double Horizontal
Surface treatment	colour
Height range [mm]	NO
Length range [mm]	1 000-1 800 (increase of 100)
Dimension changes	YES
Electric version	NO
Middle connection (SM)	STANDARD
Side connection (SB)	NO
One-sided into space fixing	NO


### Accessories

-  Colour ref. chart page 115
-  Thermostatic packs page 102

### Connection Options Coron



### Coron Double Horizontal



The type of connection must be specified in the order; for more information see page 112, positions 13 and 14./<sup>3)</sup> to the nearest larger standard dimension



Height (H) Length (L) [mm]	Depth (B)	Weight	Water capacity	Temperature exponent	Output 75/65/20°C	Power input	Connection span (Z)	White colour RAL 9016	Electric
code	[mm]	[kg]	[l]	[-]	[W]	[W]	[mm]		
DCVS 1000 0330	60	10,3	5,0	1,300	167	-	50	✓	-
DCVS 1500 0330	60	14,5	7,3	1,300	251	-	50	✓	-
DCVS 1800 0330	60	17,1	8,7	1,300	302	-	50	✓	-

Coron Double Horizontal




Height (H) Length (L) [mm]	Depth (B)	Weight	Water capacity	Temperature exponent	Output 75/65/20°C	Power input	Connection span (Z)	White colour RAL 9016	Electric
code	[mm]	[kg]	[l]	[-]	[W]	[W]	[mm]		
DCHD 0330 1000	160	17,2	10,1	1,300	447	-	50	✓	-
DCHD 0330 1500	160	25,7	14,8	1,300	671	-	50	✓	-
DCHD 0330 1800	160	30,8	17,6	1,300	805	-	50	✓	-


For ordering procedure see page 112 / The weight of radiators does not include water and packaging.

Type height (H) / length (L) [mm]

Coron

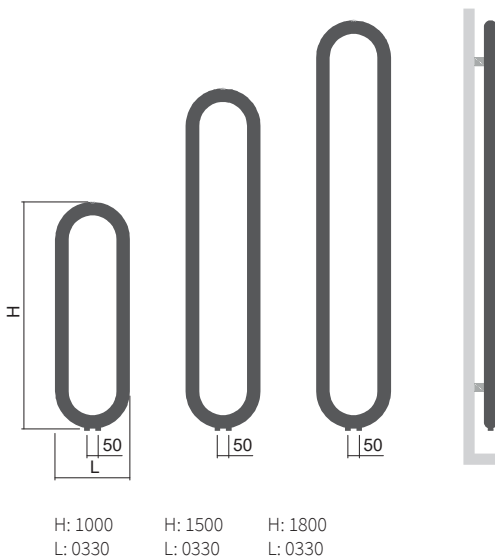


Coron Double Horizontal

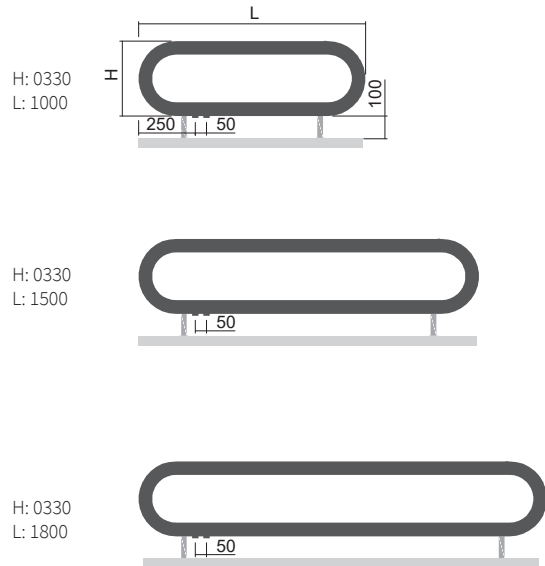

Coron / Double Horizontal 45

Mounting

Coron



Type	X [mm]	A [mm]
Metal brackets	70-80	100-110

Coron Double Horizontal



Type	X [mm]	A [mm]
Metal brackets	85	215



Coron Double Horizontal - Black RAL 9005 [19]