



**Design Radiators** by ISAN

# Antika Double

Rounded dual-design steel sections for high heating performance. Thanks to its luxurious feel, the unit provides a fully functional architectural feature in hallways or dining rooms.



bath accessories  
→ 143



connection sets  
→ 144



colour ref. chart  
→ 161



# Antika Double



Code	Depth (B) [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [-]	Output 75/65/20°C [W]	Power input Z heating rod, Mini ECO, Vision [W]	Power input Rio, Neo, Vivo [W]	Connection span (Z) [mm]	White colour RAL 9016	Electric
DAND 1800 0282	128	37,5	9,7	1,262	1 127	-	-	50	✓	-
DAND 1800 0462	128	60,5	15,8	1,262	1 793	-	-	50	✓	-
DAND 1800 0606	128	79,0	20,7	1,262	2 325	-	-	50	✓	-

For ordering procedure see page 162 / The weight of radiators does not include water and packaging


## Technical information

Material	steel pipes $\varnothing$ 28 mm steel profiles 50x10 mm
Connection threads	4xG1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	16, 26, 34

## Modification options


Surface treatment	colour
Height range [mm]	600–2000 (increase of 10)
Length range [mm]	282-966 (increase of 36)
Change of dimensions	additional charge
Electric version	NO
Middle connection (SM)	STANDARD
Side connection (SB)	YES (additional charge)
One-sided into space fixing	NO

## Type height (H) / length (L) [mm]

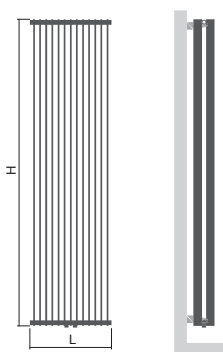

H 1800  
L 0282-0606

## Mounting



Type	X [mm]	A [mm]
Metal brackets	100	162

## Connection options



The type of connection must be specified in the order; for more information see page 162, positions 13 and 14.



Doubled heating surface