



Design Radiators by ISAN

Palmyra Plus

Palmyra Plus ranks among the most popular bathroom radiators. Its subtle and discreet design lends itself well to any bathroom. The high quality workmanship and simple design make this heating unit the right choice for your bathroom.



connection
sets



electric
regulators



colour
ref. chart





Code Height (H) / Length (L) [mm]	Depth (B) [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [-]	Output 75/65/20°C [W]	Power input [W]	Connection span [mm]	White colour RAL 9016 [€]	Electric [€]
DPAP 0735 0600	35	8,0	4,4	1,172	386	400	565	✓	✓
DPAP 1175 0600	35	12,5	7,0	1,272	643	600	565	✓	✓
DPAP 1775 0600	35	18,9	10,6	1,408	996	1000	565	✓	✓

The weight of radiators does not include water and packaging.

Technical information


Material	steel profiles Ø 35 mm steel profiles Ø 22 mm
Connection threads	4×G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Počet profilů	16, 25, 38

Modification options


Surface treatment	colour
Height range [mm]	335-1975 (increase of 40)
Length range [mm]	300-1000 (increase of 10)
Change of dimensions	additional charge 30 % ¹
Electric version	YES
Standard connection (SK)	STANDARD
Middle connection (SM)	YES (additional charge)
Side connection (SB)	YES (additional charge)
One-sided into space fixing	YES (additional charge)

¹ to the nearest larger standard dimension

Type height (H) / length (L) [mm]

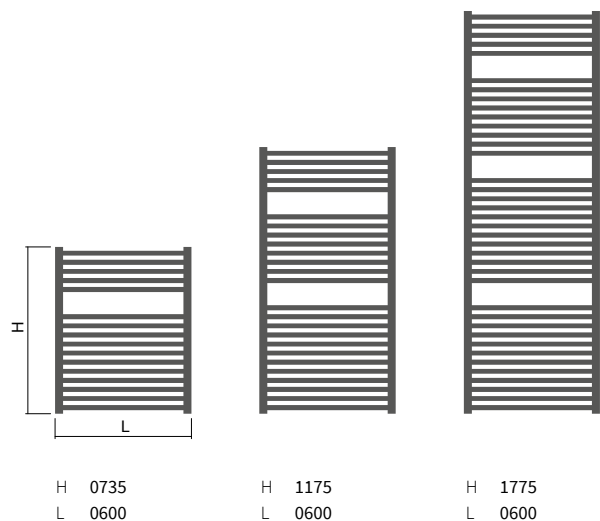


Mounting



Type	X [mm]	A [mm]
Metal brackets	69-79	87-97

Connection options

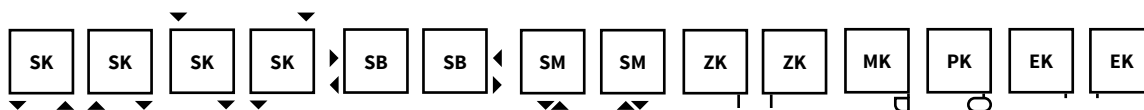

The type of connection must be specified in the order